
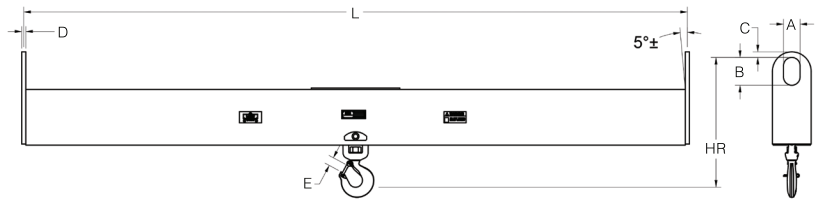


TWIN HOIST LIFTING BEAMS

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
 - Painted safety yellow for increased visibility.
 - **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
 - Durable construction ideally suited to jobsite or warehouse use.
 - Quick and easy lifting of loads with two hoists. Lifting must be done within 5° of vertical.
 - Ideally suited to low headroom applications.
 - Alloy swivel hook bottom standard connection.
 - Made in U.S.A.
 - Custom designs available - call for engineering.
 - **ALL** lifting equipment individually proof loaded per OSHA requirements.
 - All dimensions in inches unless otherwise noted.
- ⚠ Prop 65 – See Page 102**

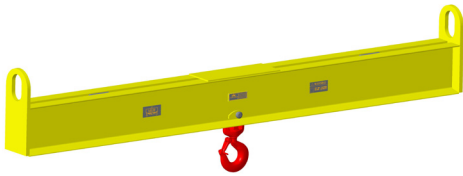

Working Load Limit in Pounds*	Part number Headroom Weight	Spread in Feet - L								A	B	C	D	E
		6	8	10	12	14	16	18	20					
4,000	Part Number	16427	16428	16429	16430	16431	16432	16433	16434	3.0	5.0	0.88	0.63	0.96
	HR=	15.10	16.10	16.10	17.10	18.10	18.10	19.10	20.10					
	Weight	140	191	260	320	560	640	765	1,055					
6,000	Part Number	16435	16436	16437	16438	16439	16440	16441	16442	3.0	5.0	1.00	0.63	1.08
	HR=	16.50	17.50	18.50	18.50	19.50	19.50	20.50	20.50					
	Weight	150	225	265	485	600	690	960	1,260					
10,000	Part Number	16443	16444	16445	16446	16447	16448	16449	16450	3.0	5.0	1.00	0.75	1.56
	HR=	22.31	22.31	22.31	23.31	23.31	23.31	25.31	25.31					
	Weight	300	380	470	670	920	1,040	1,005	1,305					
15,000	Part Number	16451	16452	16453	16454	16455	16456	16457	16458	4.0	7.0	1.00	0.75	2.17
	HR=	25.75	26.75	26.75	26.75	28.75	31.75	31.75	31.75					
	Weight	310	395	580	810	950	1,215	1,575	1,740					
20,000	Part Number	16459	16460	16461	16462	16463	16464			4.0	7.0	1.25	1.00	2.28
	HR=	27.53	27.53	29.53	32.53	32.53	32.53							
	Weight	370	585	725	975	1,565	1,770							

* Call for specifications on larger sizes and capacities