


**PLATE CLAMP – STRAIGHT**

- Non-welded Construction.
  - No Minimum Load
  - Camming Stationary Jaw
  - Camming Stationary Jaw Automatically Returns to Preload Position
  - Self Locking Jaw Closed Mechanism
  - Self Locking Jaw Open Mechanism
  - 0 - 180 Degree Turning Permissible
  - Clamp can be mounted to the work piece without the need for the operator to put hands in the fall path of the work piece
  - Designed with a 5 -1 Design Factor Criteria
  - ASME B30.20 Operation Compliant
  - ASME B30.BTH -1 Design Compliant
  - Working Load Limit (WLL) Clearly and Legibly Marked on the Clamp
  - Serial Number Clearly and Legibly Marked on the Clamp
  - Materials of Manufacture Remain Stable Under Load
  - Clamps Can Be Used to Lift Materials with a Surface Hardness of up to 400 Brinell.
  - Clamps must be used in accordance with the Instructions in the Operator Manual.
  - Operating temperature -40 to 170° Fahrenheit.
- ⚠ Prop 65 – See Page 102**

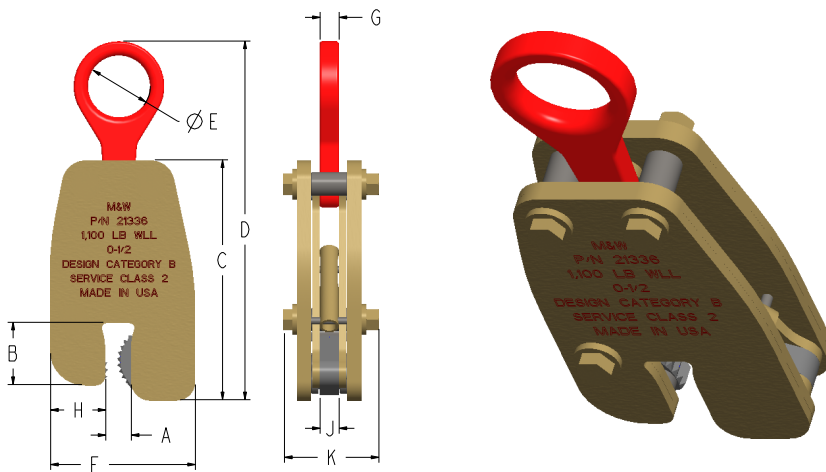

**STRAIGHT**

WLL (LBS)	Part #	A-Jaw Opening	B	C	D	E	F	G	H	J	K	Weight in Pounds
0-1,100	<b>21336</b>	0-0.5	1.64	6.31	9.44	1.63	3.81	0.5	1.45	0.5	2.5	6.1
	<b>21716</b>	0.5-1.0	1.64	6.31	9.44	1.63	4.31	0.5	1.45	0.5	2.5	6.4
	<b>21717</b>	1.0-1.5	1.64	6.31	9.44	1.63	4.81	0.5	1.45	0.5	2.5	6.7
0-2,200	<b>21851</b>	0-0.75	1.92	8.06	13.5	2.13	5.5	0.5	1.71	0.75	2.75	11.2
	<b>21852</b>	0.75-1.5	1.92	8.06	13.5	2.13	6.25	0.5	1.71	0.75	2.75	11.9
	<b>21853</b>	1.5-2.25	1.92	8.06	13.5	2.13	7	0.5	1.71	0.75	2.75	12.6
0-4,400	<b>21912</b>	0-1.0	2.41	9.37	16.1	2.38	7	0.5	2.21	0.75	3.29	19.8
	<b>21913</b>	1.0-2.0	2.41	9.37	16.1	2.38	8	0.5	2.21	0.75	3.29	21.5
	<b>21914</b>	2.0-3.0	2.41	9.37	16.1	2.38	9	0.5	2.21	0.75	3.29	24