


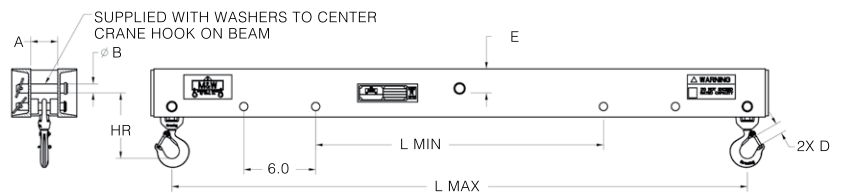
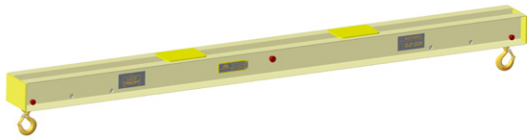
LIFTING BEAMS

Ultra Low Headroom Lifting Beams

ULTRA LOW HEADROOM LIFTING BEAMS

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Use provided spacers to assure hook remains centered.
- Made in U.S.A.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- Beams supplied standard with alloy swivel latch hook connections.

 Prop 65 – See Page 104



Working Load Limit in Pounds*	Part number Headroom Weight	Pick Points – Outside Length (L) in Feet					A	B	D
		2', 3', 4'	4', 5', 6'	6', 7', 8'	8', 9', 10'	10', 11', 12'			
1,000	Part Number	16484	16485	16486	16487	16488	2.25	0.63	0.86
	HR=	5.5	5.5	5.5	5.5	5.5			
	E=	1.94	1.94	1.94	1.94	1.94			
	Weight	57	82	100	120	145			
2,000	Part Number	16489	16490	16491	16492	16493	2.25	0.75	0.86
	HR=	5.5	5.5	6.5	6.5	6.5			
	E=	2.00	2.00	2.00	2.00	2.00			
	Weight	60	85	175	215	250			
4,000	Part Number	16494	16495	16496	16497	16498	2.25	1.00	0.89
	HR=	6.7	6.7	7.1	7.1	7.9			
	E=	2.13	2.13	2.75	2.75	3.00			
	Weight	110	150	210	310	345			
6,000	Part Number	16499	16500	16501	16502	16503	3.00	1.25	0.96
	HR=	6.9	7.6	8.6	9.6	9.6			
	E=	2.51	2.76	2.76	2.76	2.76			
	Weight	125	185	255	300	400			
10,000	Part Number	16504	16505	16506	16507	16508	3.00	1.50	1.08
	HR=	9.8	9.8	9.8	10.3	10.3			
	E=	3.25	3.25	3.25	3.75	3.75			
	Weight	240	320	400	490	695			

* Call for specifications on larger sizes and capacities