



**ADJUSTABLE SPREAD TELESCOPING BEAMS**

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Spreader Beams shipped with proof load certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Standard with swivel latch hooks. Top rigging not included - please call for pricing
- Made in U.S.A.
- Custom designs available - call for engineering.

- Minimum horizontal top rigging angle of 45°.
- Ideally suited for adding stability to critical lifts.

Prop 65 – See Page 104

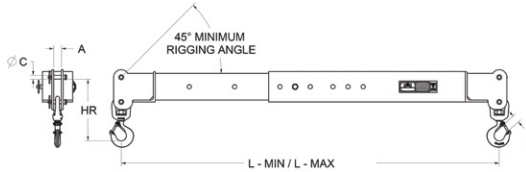

**SHOWN WITH OPTIONAL TOP RIGGING**

TELESCOPING ADJUSTABLE SPREADER BEAMS							
Working Load Limit in Pounds*	Model Number Headroom (in) Weight (lbs)	Outside Spread (L) in Feet*					A (in) C (in) E (in)
		Min Max 4 - 6	Min Max 6 - 10	Min Max 8 - 14	Min Max 12 - 20	Min Max 21 - 30	
4,000	<b>Part Number</b>	<b>12805</b>	<b>12822</b>	<b>12813</b>	<b>12829</b>	<b>24455</b>	1.00
	HR =	5.37	5.12	5.12	5.12	8.87	0.50
	LBS =	80	120	155	235	585	0.89
10,000	<b>Part Number</b>	<b>12834</b>	<b>12842</b>	<b>12848</b>	<b>12853</b>	<b>24454</b>	1.25
	HR =	6.53	6.28	6.28	6.28	11.0	0.75
	LBS =	130	190	250	365	802	1.08
20,000	<b>Part Number</b>	<b>12864</b>	<b>12872</b>	<b>12880</b>	<b>12885</b>	<b>24453</b>	1.66
	HR =	7.63	7.63	7.63	7.63	13.0	1.00
	LBS =	185	265	345	510	1160	1.31

OPTIONAL TOP RIGGING						
Working Load Limit in Pounds*	Part Name	Part Number	Part Number	Part Number	Part Number	Part Number
4,000	<b>Adjustable Spreader</b>	<b>12805</b>	<b>12822</b>	<b>12813</b>	<b>12829</b>	<b>24455</b>
	Chain	23354	23355	23356	23357	24456
	Wire Rope	23396	23397	23398	23399	24462
	Round Sling Bridle	23374	23375	23376	23377	24459
10,000	<b>Adjustable Spreader</b>	<b>12834</b>	<b>12842</b>	<b>12848</b>	<b>12853</b>	<b>24454</b>
	Chain	23378	23379	23380	23381	24457
	Wire Rope	23400	23401	23402	23403	24463
	Round Sling Bridle	23382	23383	23384	23385	24460
20,000	<b>Adjustable Spreader</b>	<b>12864</b>	<b>12872</b>	<b>12880</b>	<b>12885</b>	<b>24453</b>
	Chain	23386	23387	23388	23389	24458
	Wire Rope	23404	23405	23406	23407	24464
	Round Sling Bridle	23390	23391	23392	23393	24461

\*Minimum horizontal top rigging angle is 45° on all fixed and adjustable spreaders. M&W recommends a minimum horizontal top rigging angle of 60°. Adjustable on 1" increments.