

## FORKLIFT ATTACHMENTS

Forklift Pocket Lifters


### FORKLIFT POCKET LIFTERS

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** forklift attachments proof loaded and shipped with certification paperwork.
- OSHA required tie-off chain: Part Number 12345
- Includes forklift restraining tabs.
- Made in U.S.A.
- Custom designs available - call for engineering.
- Check with manufacturer of your forklift for load capabilities.

Prop 65 – See Page 104


Working Load Limit in Pounds*	Part Number	A	B	Fork Width	Weight
3,000	<b>11606</b>	4.5	2.5	4	12
3,000	<b>11607</b>	5.5	2.5	5	13
3,000	<b>11608</b>	6.5	2.5	6	14
3,000	<b>15427</b>	7.5	2.5	7	15
5,000	<b>14259</b>	4.5	2.5	4	16
5,000	<b>14250</b>	5.5	2.5	5	18
5,000	<b>14262</b>	6.5	2.5	6	20
7,000	<b>15764</b>	6.5	2.5	6	35
7,000	<b>16642</b>	7.5	3.5	7	40
7,000	<b>16643</b>	8.5	3.5	8	44

\* Call for specifications on larger sizes and capacities

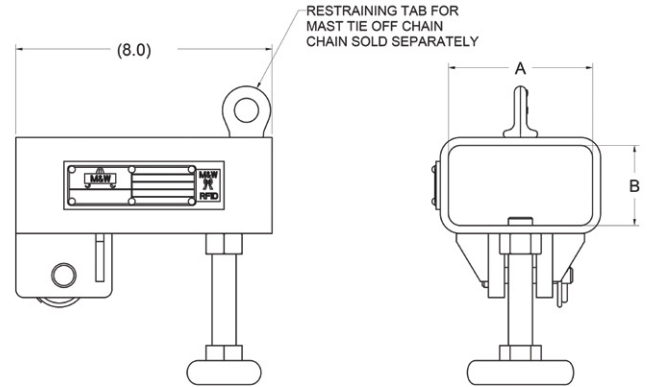

#### OPTIONAL MAST TIE OFF CHAIN:

Part Number	
<b>20410</b>	Mast Tie Off Chain - 8' Long

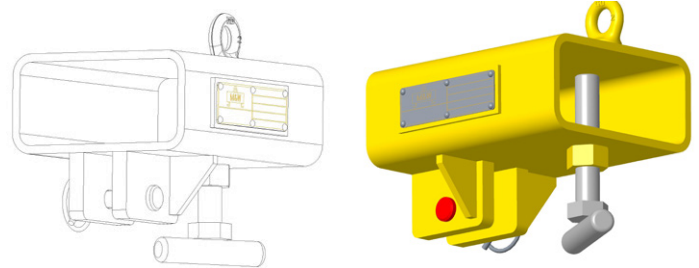

**WARNING:** M&W fork beams, fork booms, fork pockets and other lift attachments are modifications or additions that affect capacity and/or safe operation of forklifts (powered industrial trucks) and shall not be used without prior written approval from the forklift manufacturer. Capacity, Operation, Maintenance instruction plates, tags, and/or Decals shall be changed accordingly and not provided by M&W.

Reference OSHA 1910.178 | Any forklift attachment must use a tie off restraint to prevent from sliding off forks, sold separately