


## WIRE ROPE TERMINATIONS

### SA WIRE ROPE FERRULES

Mild carbon steel construction. Length is measured from outside and end of terminal. Can also be attached at any point in the assembly as well as at the end. Length and diameter can be modified per customer specifications.

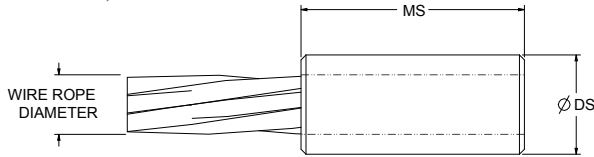


Part Number*	Wire Rope Diameter	DS	MS (approx)	Chamfer
MWSA157-02	1/16"	1/4"	3/8"	1/32 X 45°
MWSA157-03	3/32"	5/16"	1/2"	1/32 X 45°
MWSA157-04	1/8"	3/8"	5/8"	1/32 X 45°
MWSA157-05	5/32"	7/16"	3/4"	1/32 X 45°
MWSA157-06	3/16"	1/2"	7/8"	1/32 X 45°
MWSA157-07	7/32"	9/16"	1"	3/64 X 45°
MWSA157-08	1/4"	5/8"	1-1/8"	3/64 X 45°
MWSA157-09	9/32"	11/16"	1-1/4"	3/64 X 45°
MWSA157-10	5/16"	3/4"	1-3/8"	3/64 X 45°
MWSA157-12	3/8"	7/8"	1-3/4"	1/16 X 45°
MWSA157-14	7/16"	1"	2"	1/16 X 45°
MWSA157-16	1/2"	1-1/8"	2-1/4"	1/16 X 45°
MWSA157-18	9/16"	1-1/4"	2-1/2"	5/64 X 45°
MWSA157-20	5/8"	1-3/8"	3"	5/64 X 45°
MWSA157-24	3/4"	1-9/16"	3-1/2"	5/64 X 45°
MWSA157-28	7/8"	1-3/4"	4-1/4"	5/64 X 45°
MWSA157-32	1"	2"	4-3/4"	3/32 X 45°

\* Call for specifications on larger sizes and metric sizes

### SA WIRE ROPE THREADED SLEEVES


Mild carbon steel construction. NC thread pitch furnished as standard; NF thread pitch available. Right hand threads standard; left hand available. Wrench grips available per customer request. Metric sizes available.

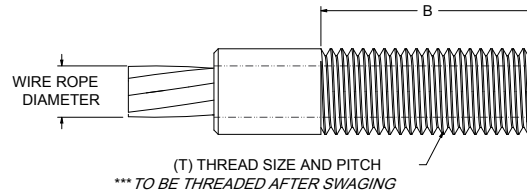

Part Number*	Wire Rope Diameter	Thread Size (T)		B
		NC	NF	
MWSA155-03	3/32"	1/4-20	1/4-28	1/2
MWSA155-04	1/8"	1/4-20	1/4-28	3/4
MWSA155-05	5/32"	5/16-18	5/16-24	1
MWSA155-06	3/16"	3/8-16	3/8-24	1-1/4
MWSA155-07	7/32"	7/16-14	7/16-20	1-1/4
MWSA155-08	1/4"	1/2-13	1/2-20	1-1/2
MWSA155-09	9/32"	9/16-12	9/16-18	1-1/2
MWSA155-10	5/16"	5/8-11	5/8-18	1-3/4
MWSA155-12	3/8"	3/4-10	3/4-16	2
MWSA155-14	7/16"	7/8-9	7/8-14	2-1/4
MWSA155-16	1/2"	1-8	1-14	2-1/2
MWSA155-18	9/16"	1-1/8-7		2-3/4
MWSA155-20	5/8"	1-1/4-7		3
MWSA155-24	3/4"	1-1/2-6		4
MWSA155-28	7/8"	1-3/4-5		5
MWSA155-32	1"	2-4-1/2		6

\* Call for specifications on larger sizes and metric sizes

### SA WIRE ROPE THREADED STUDS

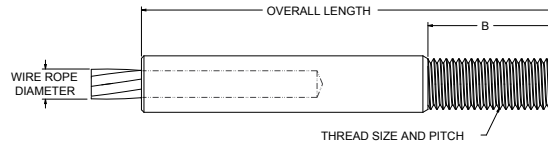

Mild carbon steel. NC thread pitch furnished; NF available. Right hand threads furnished; left hand available. Wrench grips available upon request.

Part Number*	Wire Rope Diameter	Thread Size (T)		B
		NC	NF	
MWSA156-02	1/16"	10-24	10-32	1/2
MWSA156-03	3/32"	1/4-20	1/4-28	1/2
MWSA156-04	1/8"	1/4-20	1/4-28	3/4
MWSA156-05	5/32"	5/16-18	5/16-24	7/8
MWSA156-06	3/16"	3/8-16	3/8-24	1
MWSA156-07	7/32"	7/16-14	7/16-20	1
MWSA156-08	1/4"	1/2-13	1/2-20	1-1/8
MWSA156-09	9/32"	9/16-12	9/16-18	1-1/4
MWSA156-10	5/16"	5/8-11	5/8-18	1-1/2
MWSA156-12	3/8"	3/4-10	3/4-16	1-5/8
MWSA156-14	7/16"	3/4-10	3/4-16	1-7/8

\* Call for specifications on larger sizes and metric sizes

Part Number*	Wire Rope Diameter	Thread Size (T)		B
		NC	NF	
MWSA156-16	1/2"	7/8-9	7/8-14	2-1/4
MWSA156-18	9/16"	1-8	1-14	2-1/2
MWSA156-20	5/8"	1-1/8-7		3
MWSA156-24	3/4"	1-3/8-6		3-1/4
MWSA156-28	7/8"	1-1/2-6		3-1/2
MWSA156-32	1"	1-3/4-5		4-3/8
MWSA156-36	1-1/8	2-4-1/2		4-3/4
MWSA156-40	1-1/4	2-1/4-4-1/2		5-1/8
MWSA156-44	1-3/8	2-1/2-4		5-1/2

\* Call for specifications on larger sizes and metric sizes

**CAUTION:** It is recommended that the assembly with the swaged wire rope termination be proof loaded to prove the adequacy of the assembly.

Prop 65 – See Page 104