


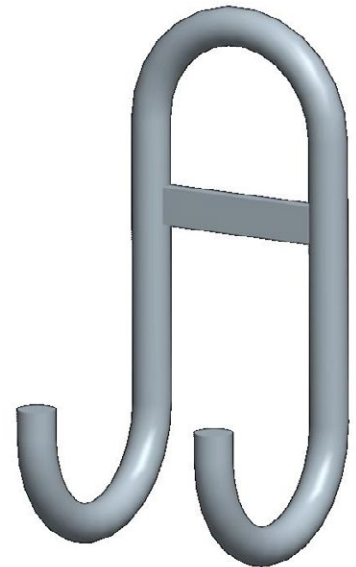
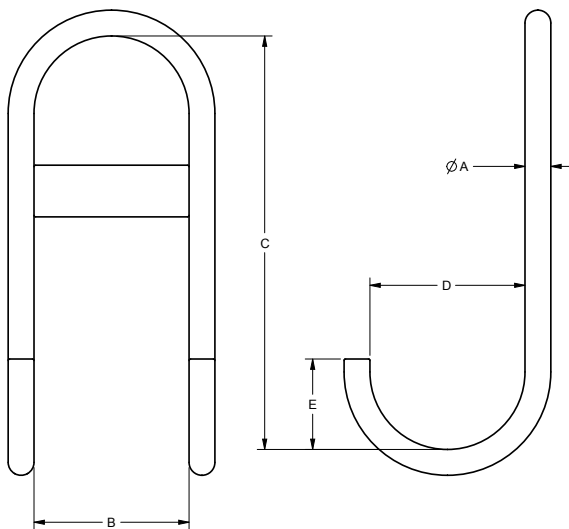
## LIFTING HOOKS

Stirrup/Double Hooks

### LIFTING HOOKS : STIRRUP / DOUBLE HOOKS

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Corrosion resistant finish.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- $\pm 4\%$  on dimensions.
- Custom designs available - call for engineering.
- **Maximum use temperature is 400° F.**

 Prop 65 – See Page 112



Material $\varnothing A$ in Inches*	Part Number	A	B	C	D	E	Weight	Working Load Limit in Pounds*
3/8	16386	0.38	2.50	8.00	2.50	1.75	1.0	450
1/2	16387	0.50	3.00	8.00	3.00	1.75	1.8	900
5/8	16388	0.63	3.50	9.00	3.50	2.50	3.2	1,500
3/4	16389	0.75	4.00	10.00	4.00	2.50	4.9	2,250
1	16390	1.00	4.50	12.00	4.50	3.00	10.0	4,600

\*Larger capacities and custom configurations available. Please call for ordering assistance.