


## WIRE MESH SLING




- Steel construction resists abrasion and cutting.
- Each sling is permanently stamped with capacity and serial number.
- Grips contour of the load.
- Each sling is proof-tested and certified.
- Grips load firmly without stretching – reduces load damage.
- Resists abrasion and cutting for greater sling life.
- Low stretch and wide-bearing area distributes load to help avoid damage.
- The slings are repairable.
- Alloy steel end fittings are powder coated for long life.
- Width of mesh helps control and balance load.
- End fittings accommodate most large crane hooks.
- Wire mesh slings shall not be used at temperatures above 550°F.
- Store in a clean, dry area.

Prop 65 – See Page 112

Wire Mesh Width (in.)	RATED CAPACITY (LBS)*		
	Vertical	Choker	Basket
2	2,300	2,300	4,600
3	3,500	3,500	7,000
4	4,800	4,800	9,600
6	7,200	7,200	14,400
8	9,600	9,600	19,200
10	12,000	12,000	24,000
12	14,400	14,400	28,800

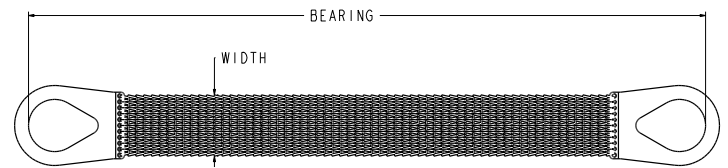

TYPE 2, TRIANGLE / TRIANGLE

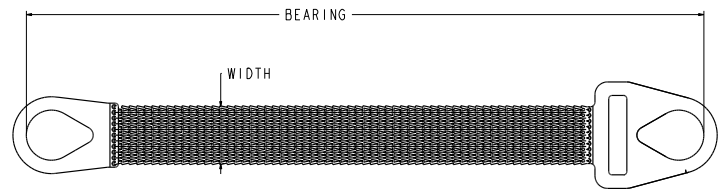

TYPE 1, TRIANGLE / CHOKER

Type	Width	10 GAUGE, PART NUMBER & LENGTH IN FEET					Weight of 3' Sling	Mesh Weight (Per ft)
		3'	4'	6'	8'	10'		
2	2"	WMTT2-3	WMTT2-4	WMTT2-6	WMTT2-8	WMTT2-10	6	1.3
2	3"	WMTT3-3	WMTT3-4	WMTT3-6	WMTT3-8	WMTT3-10	8	1.9
2	4"	WMTT4-3	WMTT4-4	WMTT4-6	WMTT4-8	WMTT4-10	10	2.5
2	6"	WMTT6-3	WMTT6-4	WMTT6-6	WMTT6-8	WMTT6-10	16	3.9
2	8"	WMTT8-3	WMTT8-4	WMTT8-6	WMTT8-8	WMTT8-10	22	5.1
2	10"	WMTT10-3	WMTT10-4	WMTT10-6	WMTT10-8	WMTT10-10	28	6.4
2	12"	WMTT12-3	WMTT12-4	WMTT12-6	WMTT12-8	WMTT12-10	34	7.6
1	2"	WMTC2-3	WMTC2-4	WMTC2-6	WMTC2-8	WMTC2-10	6	1.3
1	3"	WMTC3-3	WMTC3-4	WMTC3-6	WMTC3-8	WMTC3-10	8	1.9
1	4"	WMTC4-3	WMTC4-4	WMTC4-6	WMTC4-8	WMTC4-10	10	2.5
1	6"	WMTC6-3	WMTC6-4	WMTC6-6	WMTC6-8	WMTC6-10	16	3.9
1	8"	WMTC8-3	WMTC8-4	WMTC8-6	WMTC8-8	WMTC8-10	22	5.1
1	10"	WMTC10-3	WMTC10-4	WMTC10-6	WMTC10-8	WMTC10-10	28	6.4
1	12"	WMTC12-3	WMTC12-4	WMTC12-6	WMTC12-8	WMTC12-10	34	7.6