


LIFTING BEAMS

Adjustable Length Lifting Beams
with Swivel Hook Bottoms



- Manufactured to exceed all ASME B30.20 and OSHA regulations.
 - Painted safety yellow for increased visibility.
 - **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
 - Durable construction ideally suited to jobsite or warehouse use.
 - Quick and easy adjustment of unbalanced loads.
 - Ideally suited to low headroom applications.
 - Standard with hooks.
 - Made in U.S.A.
 - Custom designs available - call for engineering.
 - **ALL** lifting equipment individually proof loaded per OSHA requirements.
 - All dimensions in inches unless otherwise noted.
- ⚠ Prop 65 – See Page 112**

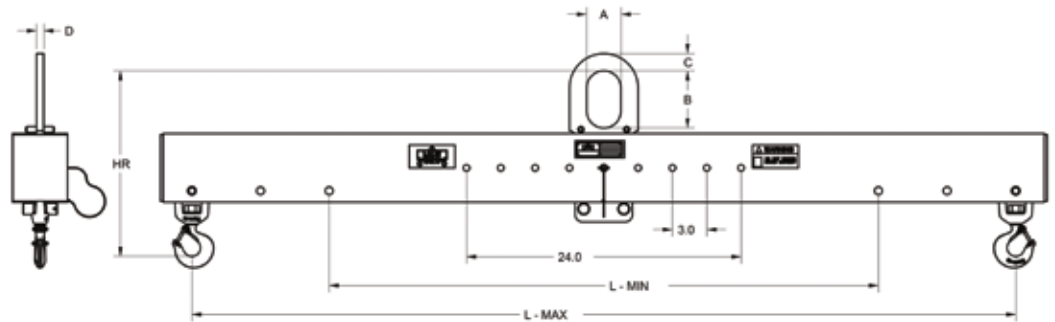

| Working Load Limit in Pounds* | Part Number | L min | L max | A | B | C | D | HR | Weight in Pounds |
|-------------------------------|-------------|-------|-------|---|---|------|------|------|------------------|
| 2,000 | 16410 | 48 | 72 | 3 | 5 | 0.75 | 0.63 | 13.8 | 85 |
| 2,000 | 16411 | 120 | 144 | 3 | 5 | 0.75 | 0.63 | 15.7 | 285 |
| 4,000 | 16412 | 48 | 72 | 3 | 5 | 1.5 | 0.63 | 14.6 | 135 |
| 4,000 | 16413 | 120 | 144 | 3 | 5 | 1.5 | 0.63 | 16.6 | 330 |
| 6,000 | 16414 | 48 | 72 | 3 | 5 | 1.5 | 0.63 | 16.2 | 160 |
| 6,000 | 16415 | 120 | 144 | 3 | 5 | 1.5 | 0.63 | 19.1 | 530 |
| 8,000 | 16416 | 48 | 72 | 4 | 7 | 2 | 0.75 | 18.9 | 200 |
| 8,000 | 16417 | 120 | 144 | 4 | 7 | 2 | 0.75 | 20.9 | 540 |
| 10,000 | 16418 | 48 | 72 | 4 | 7 | 2 | 0.75 | 21.2 | 300 |
| 10,000 | 16419 | 120 | 144 | 4 | 7 | 2 | 0.75 | 22.2 | 795 |
| 15,000 | 16420 | 48 | 72 | 4 | 7 | 2 | 1.00 | 22.1 | 315 |
| 15,000 | 16421 | 120 | 144 | 4 | 7 | 2 | 1.00 | 25.1 | 815 |

