


- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Beams supplied standard with shackle connections.
- Made in U.S.A.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.

Prop 65 – See Page 112



STANDARD WITH SHACKLES

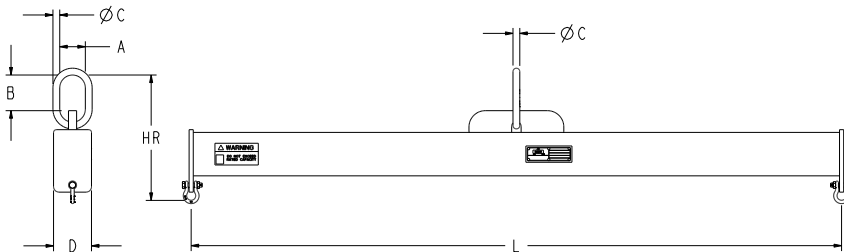

SHOWN WITH OPTIONAL HOOKS

Working Load Limit in Pounds*	Part number Headroom Weight	Spread in Inches - L										A	B	C	D	Bottom Shackle Size
		24	36	42	48	54	60	66	72	96	120					
500	Part Number	16561	12540	15028	11525	15031	15034	15037	11526	11527	11528	2.4	3.3	0.63	2.5	5/16"
	HR= Weight	10.5 22	10.5 29	10.5 33	10.5 36	10.5 40	10.5 43	10.5 47	10.5 50	10.5 65	10.5 80					
1,000	Part Number	16140	12546	15040	11529	15043	15046	15049	11530	11531	11532	2.4	3.3	0.63	3.5	5/16"
	HR= Weight	10.5 22	10.5 29	10.5 33	10.5 36	10.5 40	10.5 43	10.5 47	10.5 50	10.5 65	11.5 115					
2,000	Part Number	16124	15054	15057	11533	15060	15063	15066	11534	11535	11536	2.4	3.3	0.63	3.5	5/16"
	HR= Weight	11.5 32	11.5 42	11.5 48	11.5 52	11.5 58	11.5 63	11.5 68	11.5 73	13.8 127	13.8 155					
4,000	Part Number	16381	15070	15073	11537	15076	15079	15082	11538	11539	11540	2.4	3.3	0.63	3.5	3/8"
	HR= Weight	14.0 43	14.0 57	14.0 63	14.0 70	14.0 78	14.0 85	14.0 93	14.0 99	14.0 126	16.0 190					
6,000	Part Number	16382	14433	15085	14438	15092	15095	15098	14442	14445	14452	2.4	3.3	0.63	3.5	7/16"
	HR= Weight	14.0 43	14.0 56	14.0 67	16.0 87	16.0 95	16.0 104	16.0 114	16.0 121	16.0 220	16.0 343					

* Call for specifications on larger sizes and capacities