FORKLIFT ATTACHMENTS

Forklift Lifting Beams Outside Hooks




- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- · Painted safety yellow for increased visibility.
- ALL forklift attachments proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- · Check with manufacturer of your forklift for load capabilities.
- Made in U.S.A.

- Custom designs available call for engineering.
- · Includes forklift restraining tabs.
- · Carrying handle for easy placement by personnel -HANDLE NOT INTENDED FOR LIFTING LOADS.



Prop 65 – See Page 112

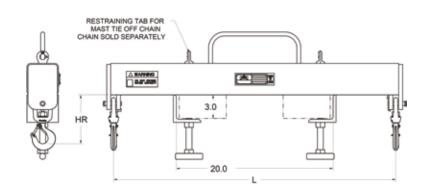



Working Load Limit in Pounds*	Part Number	HR	L	Weight
5,000	12343	6.2	36	49
10,000	12363	7.3	36	76
14,000	16523	8.8	36	90
22,000	16524	11.0	36	125

SOLD WITH HOOKS AS SHOWN

OPTIONAL MAST TIE OFF CHAIN:

Part Number	
20410	Mast Tie Off Chain - 8' Long

WARNING: M&W fork beams, fork booms, fork pockets and other lift attachments are modifications or additions that affect capacity and/or safe operation of forklifts (powered industrial trucks) and shall not be used without prior written approval from the forklift manufacturer. Capacity, Operation, Maintenance instruction plates, tags, and/or Decals shall be changed accordingly and not provided by M&W.

Reference OSHA 1910.178 | Any forklift attachment must use a tie off restraint to prevent from sliding off forks, sold separately

^{*} Call for specifications on larger sizes and capacities