
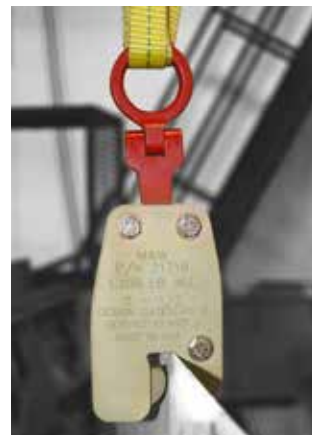


PLATE CLAMPS

Plate Clamp - Hinged

- Non-welded Construction.
 - No Minimum Load
 - Camming Stationary Jaw
 - Camming Stationary Jaw Automatically Returns to Preload Position
 - Self Locking Jaw Closed Mechanism
 - Self Locking Jaw Open Mechanism
 - 0 - 180 Degree Turning Permissible
 - Clamp can be mounted to the work piece without the need for the operator to put hands in the fall path of the work piece
 - Designed with a 5 -1 Design Factor Criteria
 - ASME B30.20 Operation Compliant
 - ASME B30.BTH -1 Design Compliant
 - Working Load Limit (WLL) Clearly and Legibly Marked on the Clamp
 - Serial Number Clearly and Legibly Marked on the Clamp
 - Materials of Manufacture Remain Stable Under Load
 - Clamps Can Be Used to Lift Materials with a Surface Hardness of up to 400 Brinell.
 - Clamps must be used in accordance with the Instructions in the Operator Manual.
 - Operating temperature -40 to 170° Fahrenheit.
- ⚠ Prop 65 – See Page 112**

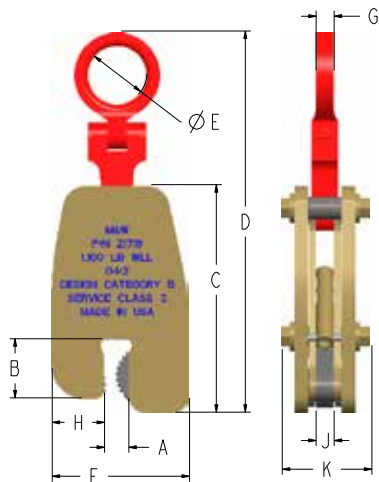

HINGED

WLL (LBS)	Part #	A-Jaw Opening	B	C	D	E	F	G	H	J	K	Weight in Pounds
0-1,100	21718	0-0.5	1.64	6.31	10.6	1.63	3.81	0.5	1.45	0.5	2.5	6.5
	21719	0.5-1.0	1.64	6.31	10.6	1.63	4.31	0.5	1.45	0.5	2.5	6.8
	21720	1.0-1.5	1.64	6.31	10.6	1.63	4.81	0.5	1.45	0.5	2.5	7.1
0-2,200	21854	0-0.75	1.92	8.06	14.7	2.13	5.5	0.5	1.71	0.75	2.75	11.7
	21855	0.75-1.5	1.92	8.06	14.7	2.13	6.25	0.5	1.71	0.75	2.75	12.3
	21856	1.5-2.25	1.92	8.06	14.7	2.13	7	0.5	1.71	0.75	2.75	13
0-4,400	21915	0-1.0	2.41	9.37	18.3	2.38	7	0.5	2.21	0.75	3.29	22.8
	21916	1.0-2.0	2.41	9.37	18.3	2.38	8	0.5	2.21	0.75	3.29	24
	21917	2.0-3.0	2.41	9.37	18.3	2.38	9	0.5	2.21	0.75	3.29	26
0-11,000	22688	0-1.5	3.11	12.75	23.0	3.0	10.5	1.0	3.5	1.13	5.0	79
	22689	1.5-3.0	3.11	12.75	23.0	3.0	12.0	1.0	3.5	1.13	5.0	82
	22690	3-4.5	3.11	12.75	23.0	3.0	13.5	1.0	3.5	1.13	5.0	85