
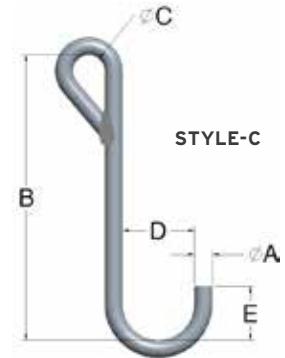


- ±4% on dimensions.
- Custom designs available - call for engineering.
- All eyes welded unless otherwise specified.
- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Corrosion resistant finish.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- **Maximum use temperature is 400° F.**

 Prop 65 – See Page 112



Material ØA in Inches*	Part Number C = D = E =	Standard Alloy Style C Steel J-Hooks - B (length)							
		5"	6"	7"	8"	9"	10"	12"	14"
Ø 1/4" WLL = 100 Pounds	<b>Part Number</b>	<b>11653-5</b>	<b>11653-6</b>	<b>11653-7</b>	<b>11653-8</b>	<b>11653-9</b>	<b>11653-10</b>	<b>11653-12</b>	<b>11653-14</b>
	C =	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	D =	1.25	1.25	1.25	1.25	1.25	1.25	1.25	1.25
	E =	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
	<b>WEIGHT</b>	0.14	0.9	0.9	0.9	0.9	1	1	1
Ø 5/16" WLL = 250 Pounds	<b>Part Number</b>	<b>11654-5</b>	<b>11654-6</b>	<b>11654-7</b>	<b>11654-8</b>	<b>11654-9</b>	<b>11654-10</b>	<b>11654-12</b>	<b>11654-14</b>
	C =	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	D =	1.25	1.25	1.25	1.25	1.25	1.25	1.25	1.25
	E =	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
	<b>WEIGHT</b>	0.21	0.9	0.9	0.9	0.9	1	1	1
Ø 3/8" WLL = 365 Pounds	<b>Part Number</b>	<b>11655-5</b>	<b>11655-6</b>	<b>11655-7</b>	<b>11655-8</b>	<b>11655-9</b>	<b>11655-10</b>	<b>11655-12</b>	<b>11655-14</b>
	C =	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	D =	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
	E =	1.12	1.12	1.12	1.12	1.12	1.12	1.12	1.12
	<b>WEIGHT</b>	1.1	0.37	1.1	1.1	1.1	1.3	1.3	1.3
Ø 1/2" WLL = 650 Pounds	<b>Part Number</b>	<b>11656-5</b>	<b>11656-6</b>	<b>11656-7</b>	<b>11656-8</b>	<b>11656-9</b>	<b>11656-10</b>	<b>11656-12</b>	<b>11656-14</b>
	C =	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	D =	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
	E =	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
	<b>WEIGHT</b>	1.5	1.5	1.5	0.83	1.6	1.7	1.7	1.8
Ø 5/8" WLL = 1,000 Pounds	<b>Part Number</b>	<b>11657-5</b>	<b>11657-6</b>	<b>11657-7</b>	<b>11657-8</b>	<b>11657-9</b>	<b>11657-10</b>	<b>11657-12</b>	<b>11657-14</b>
	C =	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	D =	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50
	E =	1.87	1.87	1.87	1.87	1.87	1.87	1.87	1.87
	<b>WEIGHT</b>	1.9	1.9	1.9	2	1.5	2	2.1	2.2
Ø 3/4" WLL = 1,450 Pounds	<b>Part Number</b>		<b>11658-6</b>	<b>11658-7</b>	<b>11658-8</b>	<b>11658-9</b>	<b>11658-10</b>	<b>11658-12</b>	<b>11658-14</b>
	C =		1.00	1.00	1.00	1.00	1.00	1.00	1.00
	D =		3.00	3.00	3.00	3.00	3.00	3.00	3.00
	E =		2.25	2.25	2.25	2.25	2.25	2.25	2.25
	<b>WEIGHT</b>		2.3	2.3	2.3	2.4	2.34	2.5	2.6
Ø 7/8" WLL = 1,900 Pounds	<b>Part Number</b>				<b>11659-8</b>	<b>11659-9</b>	<b>11659-10</b>	<b>11659-12</b>	<b>11659-14</b>
	C =				1.00	1.00	1.00	1.00	1.00
	D =				3.50	3.50	3.50	3.50	3.50
	E =				2.62	2.62	2.62	2.62	2.62
	<b>WEIGHT</b>				2.7	2.8	2.9	3.8	3.2
Ø 1" WLL = 2,600 Pounds	<b>Part Number</b>						<b>11660-10</b>	<b>11660-12</b>	<b>11660-14</b>
	C =						1.25	1.25	1.25
	D =						4.00	4.00	4.00
	E =						3.00	3.00	3.00
	<b>WEIGHT</b>						3	3.3	5.75

\*Larger capacities and custom configurations available. Please call for ordering assistance.