
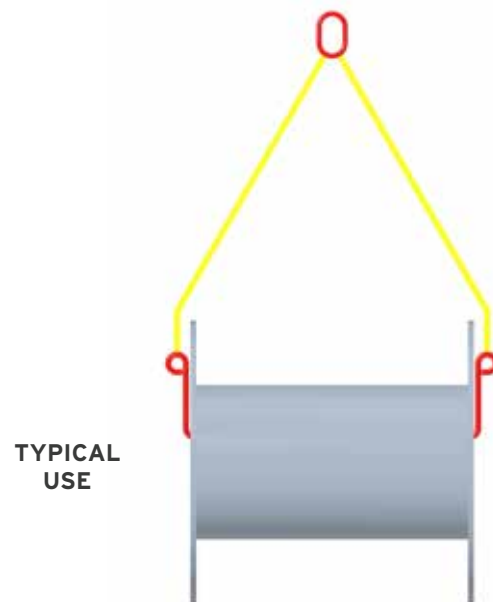
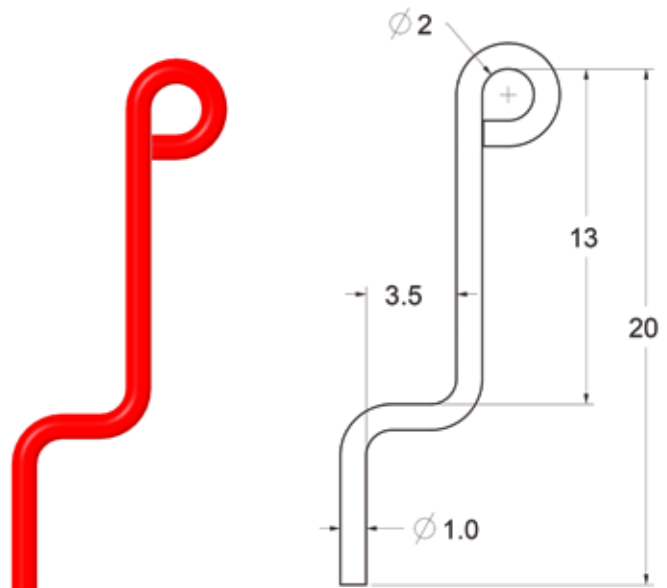


- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Powder coat painted safety red for increased visibility.
- Proof load certificates included.
- Durable construction ideally suited to jobsite use.
- Made in U.S.A.
- $\pm 4\%$ on dimensions.

 Prop 65 – See Page 112

| Working Load Limit in Pounds* | Part Number | Weight |
|-------------------------------|-------------|--------|
| 3,000 | 13409 | 5 |

- 3,000 pound Working Load Limit per hook.
- 6,000 pound Working Load Limit at 60 degrees when used in pairs.
- 1" diameter hook fits most any reel opening.
- Hook design permits almost universal use no matter the reel size or configuration.
- Shown on 2-leg bridle sling.
- Optional 2-leg bridle sling available upon request.
- Call for details.
- Sold as each.



TYPICAL USE