



**LIFTING BEAMS**

Low Headroom, Multiple Length  
Standard Lifting Beam

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Standard with hooks.
- Made in U.S.A.
- Machined to exacting tolerances.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.


 Prop 65 – See Page 112

Working Load Limit in Pounds	Model Number Headroom (in) Weight (lbs)	Pick Points – Outside Length (L) in Feet – Min / Max				
		Min Max 2', 3', 4'	Min Max 4', 5', 6'	Min Max 6', 7', 8'	Min Max 8', 9', 10'	Min Max 10', 11', 12'
1,000	<b>Part Number</b> HR = LBS =	<b>11937</b> 13.11 56	<b>11959</b> 13.11 75	<b>11960</b> 13.11 95	<b>11961</b> 13.11 115	<b>11962</b> 13.11 200
2,000	<b>Part Number</b> HR = LBS =	<b>11983</b> 13.11 56	<b>11984</b> 13.11 75	<b>11985</b> 14.11 167	<b>11989</b> 14.11 205	<b>11990</b> 14.11 240
4,000	<b>Part Number</b> HR = LBS =	<b>12032</b> 15.12 98	<b>12033</b> 15.12 135	<b>12034</b> 16.12 200	<b>12039</b> 16.12 295	<b>12042</b> 17.12 395
6,000	<b>Part Number</b> HR = LBS =	<b>12069</b> 15.25 120	<b>12084</b> 16.25 180	<b>12087</b> 17.25 255	<b>12090</b> 18.25 380	<b>12094</b> 18.25 440
10,000	<b>Part Number</b> HR = LBS =	<b>12117</b> 21.25 265	<b>12123</b> 21.25 345	<b>12126</b> 21.25 430	<b>12129</b> 22.25 500	<b>12132</b> 21.12 590
15,000	<b>Part Number</b> HR = LBS =	<b>12162</b> 24.27 265	<b>12165</b> 24.28 365	<b>12168</b> 25.28 450	<b>12171</b> 25.28 640	<b>12174</b> 25.28 870
20,000	<b>Part Number</b> HR = LBS =	<b>12199</b> 23.75 290	<b>12202</b> 24.75 375	<b>12205</b> 24.75 625	<b>12208</b> 26.75 755	<b>12212</b> 29.75 985
30,000	<b>Part Number</b> HR = LBS =	<b>12223</b> 38.00 345	<b>12229</b> 38.00 555	<b>12232</b> 43.00 675	<b>12236</b> 43.00 1,235	<b>12263</b> 40.20 1,185
40,000	<b>Part Number</b> HR = LBS =	<b>12250</b> 33.81 445	<b>12254</b> 33.81 850	<b>12257</b> 33.81 1,050	<b>12287</b> 41.79 1,195	<b>12292</b> 41.97 1,540

## LIFTING BEAMS

Low Headroom, Multiple Length

Standard Lifting Beam

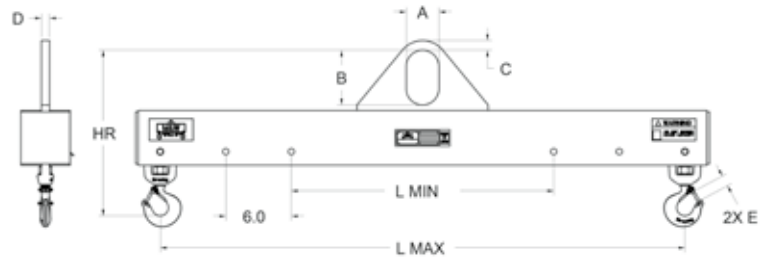

Pick Points – Outside Length (L) in Feet					Other Dimensions	Working Load Limit in Pounds
LMin LMax 12', 13', 14'	LMin LMax 14', 15', 16'	LMin LMax 16', 17', 18'	LMin LMax 18', 19', 20'	LMin LMax 22', 23', 24'		
<b>11968</b> 13.11 226	<b>11971</b> 14.11 313	<b>11974</b> 14.11 350	<b>11977</b> 14.11 390	<b>11981</b> 15.11 535	C=.875, A=3.0 B=5.0, D=.75 E=.91	1,000
<b>12017</b> 15.11 320	<b>12018</b> 15.11 365	<b>12019</b> 15.11 500	<b>12020</b> 16.11 525	<b>12024</b> 17.11 945	C=.875, A=3.0 B=5.0, D=.75 E=.91	2,000
<b>12046</b> 18.12 575	<b>12050</b> 18.12 650	<b>12055</b> 19.12 771	<b>12059</b> 20.12 1,060	<b>12063</b> 22.12 1,510	C=.875, A=3.0 B=5.0, D=.75 E=1.0	4,000
<b>12098</b> 19.25 635	<b>12102</b> 20.25 715	<b>12106</b> 20.25 990	<b>12109</b> 20.25 1,295	<b>12112</b> 22.25 1,310	C=1.25, A=3.0 B=5.0, D=1.00 E=1.00	6,000
<b>12138</b> 22.25 970	<b>12141</b> 22.25 1,095	<b>12148</b> 24.25 1,035	<b>12152</b> 24.25 1,340	<b>12155</b> 26.50 1,800	C=2.0, A=4.0 B=7.0, D=1.25 E=1.09	10,000
<b>12177</b> 27.28 1,000	<b>12180</b> 30.28 1,265	<b>12183</b> 30.28 1,405	<b>12186</b> 29.84 1,800		C=2.0, A=4.0 B=7.0, D=1.25 E=1.56	15,000
<b>12215</b> 29.75 1,595	<b>12218</b> 29.75 1,799	<b>12280</b> 35.08 1,655	<b>12284</b> 35.08 1,815		C=2.0, A=4.0 B=7.0, D=1.25 E=1.61	20,000
<b>12267</b> 40.48 1,540	<b>12270</b> 40.66 1,865	<b>12274</b> 40.84 2,250	<b>12277</b> 41.07 2,750		C=2.5, A=5.0 B=9.0, D=1.50 E=2.08	30,000
<b>12295</b> 42.15 1,850	<b>12300</b> 43.58 2,130	<b>12304</b> 43.74 2,555	<b>12307</b> 43.92 3,045		C=2.5, A=5.0 B=9.0, D=1.50 E=2.08	40,000