


- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Beams supplied standard with shackle connections.
- Made in U.S.A.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.

Prop 65 – See Page 112



**STANDARD WITH SHACKLES**

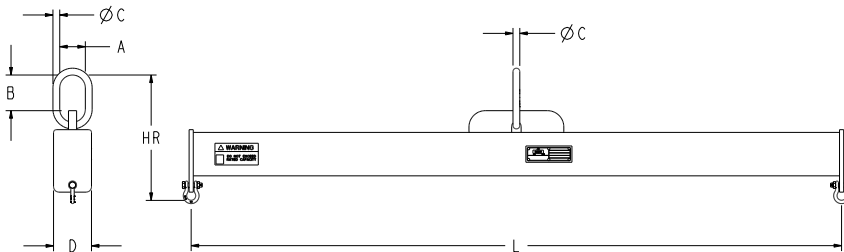

**SHOWN WITH OPTIONAL HOOKS**

Working Load Limit in Pounds*	Part number Headroom Weight	Spread in Inches - L										A	B	C	D	Bottom Shackle Size
		24	36	42	48	54	60	66	72	96	120					
500	<b>Part Number</b>	<b>16561</b>	<b>12540</b>	<b>15028</b>	<b>11525</b>	<b>15031</b>	<b>15034</b>	<b>15037</b>	<b>11526</b>	<b>11527</b>	<b>11528</b>	2.4	3.3	0.63	2.5	5/16"
	HR= Weight	10.5 22	10.5 29	10.5 33	10.5 36	10.5 40	10.5 43	10.5 47	10.5 50	10.5 65	10.5 80					
1,000	<b>Part Number</b>	<b>16140</b>	<b>12546</b>	<b>15040</b>	<b>11529</b>	<b>15043</b>	<b>15046</b>	<b>15049</b>	<b>11530</b>	<b>11531</b>	<b>11532</b>	2.4	3.3	0.63	3.5	5/16"
	HR= Weight	10.5 22	10.5 29	10.5 33	10.5 36	10.5 40	10.5 43	10.5 47	10.5 50	10.5 65	11.5 115					
2,000	<b>Part Number</b>	<b>16124</b>	<b>15054</b>	<b>15057</b>	<b>11533</b>	<b>15060</b>	<b>15063</b>	<b>15066</b>	<b>11534</b>	<b>11535</b>	<b>11536</b>	2.4	3.3	0.63	3.5	5/16"
	HR= Weight	11.5 32	11.5 42	11.5 48	11.5 52	11.5 58	11.5 63	11.5 68	11.5 73	13.8 127	13.8 155					
4,000	<b>Part Number</b>	<b>16381</b>	<b>15070</b>	<b>15073</b>	<b>11537</b>	<b>15076</b>	<b>15079</b>	<b>15082</b>	<b>11538</b>	<b>11539</b>	<b>11540</b>	2.4	3.3	0.63	3.5	3/8"
	HR= Weight	14.0 43	14.0 57	14.0 63	14.0 70	14.0 78	14.0 85	14.0 93	14.0 99	14.0 126	16.0 190					
6,000	<b>Part Number</b>	<b>16382</b>	<b>14433</b>	<b>15085</b>	<b>14438</b>	<b>15092</b>	<b>15095</b>	<b>15098</b>	<b>14442</b>	<b>14445</b>	<b>14452</b>	2.4	3.3	0.63	3.5	7/16"
	HR= Weight	14.0 43	14.0 56	14.0 67	16.0 87	16.0 95	16.0 104	16.0 114	16.0 121	16.0 220	16.0 343					

\* Call for specifications on larger sizes and capacities