
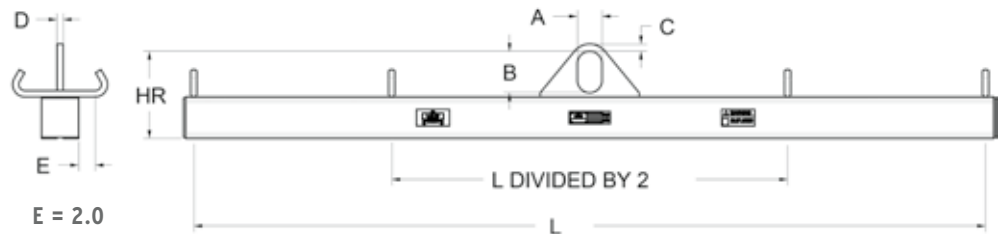


- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Designed to be used with lifting slings in a basket hitch
- Two sets of lifting sling hooks are standard
- Hooks designed for 2" eye width
- Custom configurations available - call for ordering assistance
- Made in U.S.A.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.

 Prop 65 – See Page 112



Working Load Limit in Pounds*	Model Number Headroom (in) Weight (lbs)	Outside Spread (L) in Feet*							A (in) B (in) C (in)
		4	6	8	10	12	14	16	
1,000	<b>Part Number</b>	<b>17492</b>	<b>17493</b>	<b>17494</b>	<b>17495</b>	<b>17496</b>	<b>17497</b>	<b>17498</b>	3.0 5.0 .88
	HR =	9.50	9.50	9.50	9.50	9.50	9.50	10.50	
	LBS =	65	80	100	120	205	235	315	
2,000	<b>Part Number</b>	<b>17499</b>	<b>17500</b>	<b>17501</b>	<b>17502</b>	<b>17503</b>	<b>17504</b>	<b>17505</b>	3.0 5.0 .88
	HR =	9.50	9.50	10.50	10.50	10.50	11.50	11.50	
	LBS =	65	80	175	210	245	325	370	
4,000	<b>Part Number</b>	<b>17506</b>	<b>17507</b>	<b>17154</b>	<b>17508</b>	<b>17509</b>	<b>17510</b>	<b>17511</b>	3.0 5.0 .88
	HR =	10.50	10.50	11.50	11.50	12.50	13.50	13.50	
	LBS =	110	150	210	310	340	580	660	
10,000	<b>Part Number</b>	<b>17512</b>	<b>17513</b>	<b>17514</b>	<b>17515</b>	<b>17516</b>	<b>17517</b>	<b>16574</b>	4 7 2
	HR =	16.37	16.37	16.37	17.37	17.37	17.37	17.37	
	LBS =	260	340	425	510	720	965	1,090	

\* Call for specifications on larger sizes and capacities