
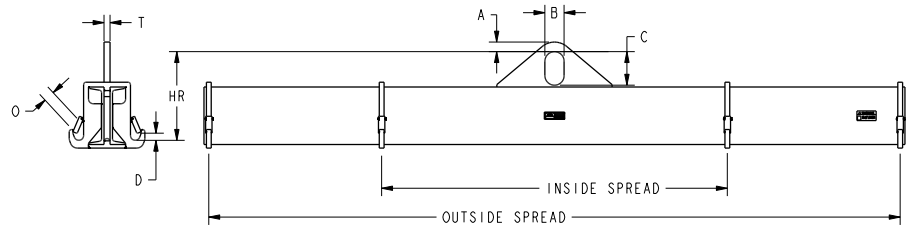


LIFTING BEAMS

Heavy Duty Twin Basket Beam

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Designed to be used with lifting slings in a basket hitch
- Two sets of lifting sling hooks are standard
- Custom configurations available - call for ordering assistance
- Made in U.S.A.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.

 Prop 65 – See Page 112



Part #	Working Load Limit in LBS	Pick Points (Outside Spread)	Pick Points (Inside Spread)	HR	A	B	C	T	O	D	Weight
25646	10,000	48	26	18.5	2	4	7	1.25	1.8	1.7	425
25647	10,000	96	48	18.5	2	4	7	1.25	1.8	1.7	665
25648	10,000	144	72	18.5	2	4	7	1.25	1.8	1.7	905
25649	10,000	192	96	18.5	2	4	7	1.25	1.8	1.7	1150
25650	10,000	240	120	18.5	2	4	7	1.25	1.8	1.7	1395
25651	15,000	48	26	21.2	2	4	7	1.25	1.9	1.7	610
25652	15,000	96	48	21.2	2	4	7	1.25	1.9	1.7	885
25653	15,000	144	72	21.2	2	4	7	1.25	1.9	1.7	1155
25654	15,000	192	96	21.2	2	4	7	1.25	1.9	1.7	1425
25655	15,000	240	120	21.2	2	4	7	1.25	1.9	1.7	1695
25656	20,000	48	26	18.9	2	4	7	1.25	1.9	1.7	810
25657	20,000	96	48	18.9	2	4	7	1.25	1.9	1.7	1160
25658	20,000	144	72	18.9	2	4	7	1.25	1.9	1.7	1510
25659	20,000	192	96	18.9	2	4	7	1.25	1.9	1.7	1860
25660	20,000	240	120	18.9	2	4	7	1.25	1.9	1.7	2215