


LIFTING BEAMS

Universal



- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow lift lug for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Lift beam, spreader beam, fork lift beam
- A true universal beam
- Shackles, hooks, mast tie off and top rigging by others
- Made in U.S.A.
- Custom sizes available
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.

Prop 65 – See Page 112

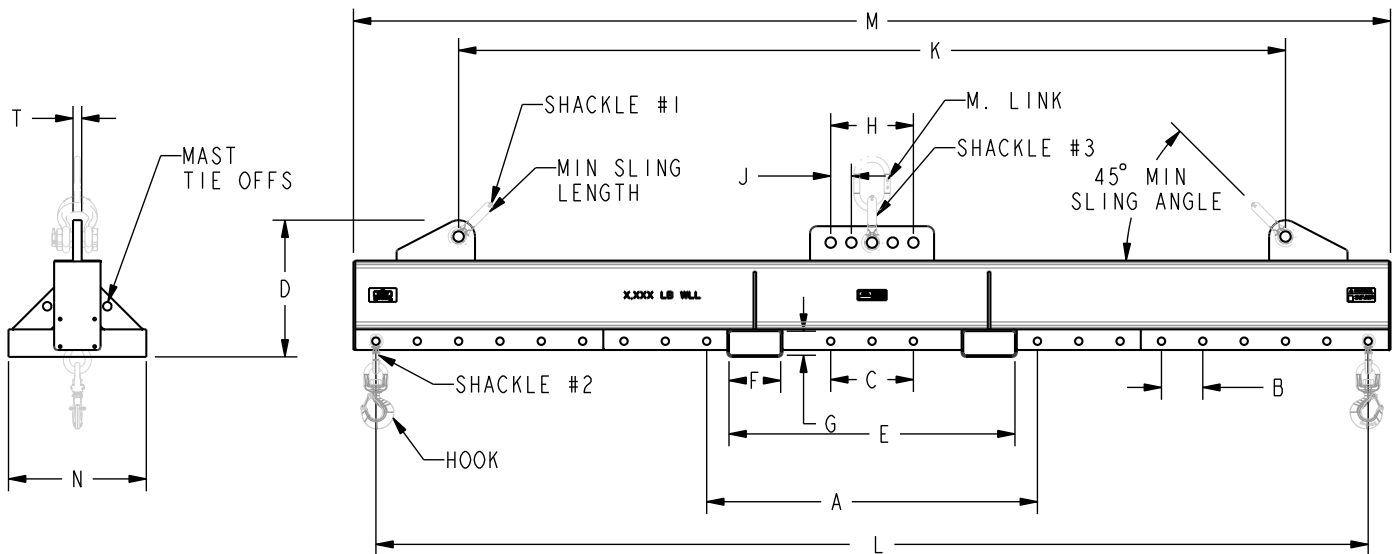

Part Number	Capacity in Pounds	L = Length	A	B	C	D	E*	F*	G*	H	J	K	M	N	T	Weight	Shackle #1 Size	Shackle #2 Size	Shackle #3 Size	M. Link Size	Hook Size	Min Sling Length
24662	6,000	144	48	6	12	15.7	41.5	7.5	3.5	12	3	120	150.5	20	1	535	3/4"	5/8"	3/4"	3/4"	2t	82"
24663	10,000	144	48	6	12	20	41.5	7.5	3.5	12	3	120	150.5	20	1.25	868	1 1/4"	7/8"	1 1/4"	7/8"	5t	82"
24664	15,000	144	48	6	12	20	41.5	7.5	3.5	12	3	120	150.5	20	1.25	1115	1 1/4"	7/8"	1 1/4"	1"	5t	82"
24665	20,000	144	48	6	12	21.9	41.5	7.5	3.5	12	3	120	150.5	20	1.25	1120	1 1/4"	7/8"	1 1/4"	1"	5t	82"
26336	40,000	144	48	6	12	29.0	41.5	7.5	3.5	12	3	120	150.5	36	1.5	2145	1 3/4"	1 1/8"	1 3/4"	1 1/2"	11t	82"

* See Fork Lift Attachment Rules OSHA 1910.178

OPTIONAL MAST TIE OFF CHAIN

Part Number	Description
20410	Mast Tie Off Chain – 8' Long

