


## LIFTING HOOKS

Alloy Steel Latching J-Hooks

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Corrosion resistant finish.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- $\pm 4\%$  on dimensions.
- All eyes welded unless otherwise specified.
- **Maximum use temperature is 400° F.**

 Prop 65 – See Page 112

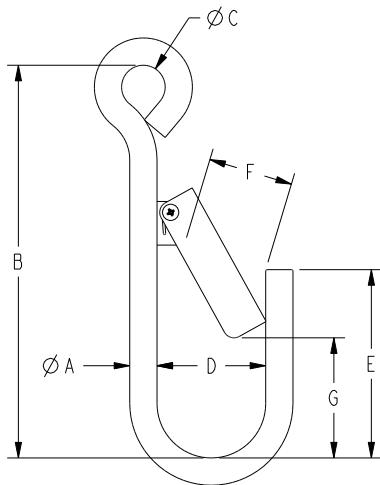

STYLE B



STYLE A



| Material<br>ØA in Inches* | Style A Part<br>Number | Style B Part<br>Number | Standard Alloy Steel J-Hooks |       |      |      |      |      |     | Latch        | Working Load<br>Limit in Pounds* | Weight LBS |
|---------------------------|------------------------|------------------------|------------------------------|-------|------|------|------|------|-----|--------------|----------------------------------|------------|
|                           |                        |                        | A                            | B     | C    | D    | E    | F    | G   |              |                                  |            |
| 1/4                       | <b>16284</b>           | <b>17595</b>           | 0.25                         | 4.50  | 1.00 | 1.25 | 2.00 | 0.75 | 1.2 | <b>23980</b> | 125                              | .20        |
| 5/16                      | <b>16016</b>           | <b>17596</b>           | 0.32                         | 5.00  | 1.00 | 1.25 | 2.00 | 0.80 | 1.2 | <b>23980</b> | 250                              | .30        |
| 3/8                       | <b>14924</b>           | <b>17611</b>           | 0.38                         | 6.00  | 1.00 | 1.50 | 2.38 | 0.96 | 1.3 | <b>23980</b> | 365                              | .55        |
| 1/2                       | <b>14767</b>           | <b>17612</b>           | 0.50                         | 8.00  | 1.00 | 2.00 | 3.13 | 1.50 | 1.7 | <b>23981</b> | 650                              | 1.2        |
| 5/8                       | <b>14930</b>           | <b>17613</b>           | 0.62                         | 9.00  | 1.00 | 2.50 | 4.32 | 1.76 | 2.5 | <b>23888</b> | 1,000                            | 2.0        |
| 3/4                       | <b>16383</b>           | <b>17614</b>           | 0.75                         | 10.00 | 1.25 | 3.00 | 5.25 | 2.21 | 3.0 | <b>23889</b> | 1,435                            | 3.4        |
| 7/8                       | <b>16384</b>           | <b>17615</b>           | 0.88                         | 12.00 | 1.25 | 3.50 | 6.25 | 2.57 | 3.5 | <b>23890</b> | 1,900                            | 5.0        |
| 1                         | <b>16385</b>           | <b>17616</b>           | 1.00                         | 14.00 | 1.25 | 4.50 | 8.25 | 3.70 | 4.5 | <b>23891</b> | 2,300                            | 8.0        |

\*Larger capacities and custom configurations available. Please call for ordering assistance.