



## WIRE ROPE TERMINATIONS

Wire Rope Threaded Stud Ends  
1/4" to 1-1/2" Wire Rope Diameter

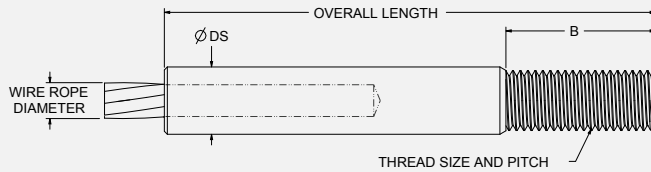

Mild carbon steel, stainless, NC or NF thread pitch, right hand threads or left hand threads available - specify when ordering. See ordering note below. Wrench grips available upon request - supplied without wrench grips unless requested.

 Prop 65 – See Page 112

Part Number*	Wire Rope Diameter	DS After Swage Dim Min	DS After Swage Dim	DS After Swage Dim Max	Overall Length (approx)	B	NC Thread Pitch	NF Thread Pitch	Weight Each
WR-10471	1/4"	0.553	0.563	0.573	4.72	1.50	9/16-12	9/16-18	0.28
WR-10472	1/4"	0.49	0.50	0.51	4.72	1.50	1/2-13	1/2-20	0.21
WR-10473	1/4"	0.43	0.438	0.46	4.06	1.50	1/2-13	1/2-20	0.16
WR-10474	1/4"	0.43	0.438	0.46	5.06	2.50	1/2-13	1/2-20	0.20
WR-10475	5/16"	0.615	0.625	0.65	5.72	1.75	5/8-11	5/8-18	0.41
WR-10476	5/16"	0.615	0.625	0.65	8.97	5.00	5/8-11	5/8-18	0.64
WR-10477	5/16"	0.553	0.563	0.585	5.06	1.87	5/8-11	5/8-18	0.33
WR-10478	3/8"	0.74	0.75	0.78	6.75	2.00	3/4-10	3/4-16	0.72
WR-10479	3/8"	0.74	0.75	0.78	9.75	5.00	3/4-10	3/4-16	1.05
WR-10480	3/8"	0.615	0.625	0.65	6.25	2.25	3/4-10	3/4-16	0.58
WR-10481	7/16"	0.865	0.875	0.91	7.66	2.25	7/8-9	7/8-14	1.13
WR-10482	7/16"	0.74	0.75	0.78	7.31	2.62	7/8-9	7/14	0.90
WR-10483	1/2"	0.99	1.00	1.03	8.56	2.50	1-8	1-12	1.64
WR-10484	1/2"	0.99	1.00	1.03	12.06	6.00	1-8	1-12	2.4
WR-10485	1/2"	0.865	0.875	0.91	8.25	3.00	1-8	1-12	1.36
WR-10486	1/2"	0.74	0.75	0.78	6.625	2.25	7/8-9	7/8-14	1.00
WR-10487	9/16"	1.115	1.125	1.16	9.625	2.75	1-1/8-7	1-1/8-12	2.33
WR-10488	9/16"	0.99	1.00	1.03	9.25	3.375	1-1/8-7	1-1/8-12	1.93
WR-10489	5/8"	1.24	1.25	1.28	10.66	3.125	1-1/4-7	1-1/4-12	3.23
WR-10490	5/8"	1.115	1.125	1.16	10.125	3.75	1-1/4-7	1-1/4-12	2.66
WR-10491	3/4"	1.49	1.50	1.55	12.69	3.75	1-1/2-6	1-1/2-12	5.51
WR-10492	3/4"	1.365	1.375	1.42	12.81	4.50	1-1/2-6	1-1/2-12	4.56
WR-10493	7/8"	1.74	1.75	1.80	14.625	4.375	1-3/4-5	1-3/4-12	8.58
WR-10494	7/8"	1.49	1.50	1.55	14.56	5.25	1-3/4-5	1-3/4-12	7.14
WR-10495	1"	1.99	2.00	2.05	16.66	5.00	2"-4.5	2"-12	12.60
WR-10496	1"	1.74	1.75	1.80	16.25	6.00	2"-4.5	2"-12	10.66
WR-10497	1-1/8"	2.24	2.25	2.30	18.625	5.625	2-1/4-4.5	2-1/4-12	18.00
WR-10498	1-1/8"	1.99	2.00	2.05	18.25	6.75	2-1/4-4.5	2-1/4-12	15.63
WR-10499	1-1/4"	2.49	2.50	2.56	20.66	6.25	2-1/2-4	2-1/2-12	24.69
WR-10500	1-1/4"	2.24	2.25	2.30	20.25	7.50	2-1/2-4	2-1/2-12	21.00
WR-10501	1-3/8"	2.74	2.75	2.81	22.53	6.875	2-3/4-4	2-3/4-12	33.06
WR-10502	1-3/8"	2.365	2.375	2.41	22.875	8.25	2-3/4-4	2-3/4-12	30.50
WR-10503	1-1/2"	2.99	3.00	3.06	24.25	7.50	3"-4	3"-12	49.30
WR-10504	1-1/2"	2.74	2.75	2.81	24.75	9.00	3"-4	3"-12	41.10

\* Call for specifications on different sizes or material

When ordering, please specify as follows: **PartNumber - A - B - C - D**

For **field A**, please specify "M" for mild carbon steel or "S" for stainless steel. For **field B**, please specify "C" for coarse thread or "F" for fine thread.

For **field C**, please specify "R" for right hand thread or "L" for left hand thread. For **field D**, please indicate "W" for wrench flats or leave blank for none.

For example, **WR-10471-M-C-R** would be a threaded stud end for 1/4" wire rope made out of mild carbon steel with coarse right-hand threads and no wrench flats.

**CAUTION:** It is recommended that the assembly with the swaged wire rope termination be proof loaded to prove the adequacy of the assembly.