


### Lifting Hooks : Alloy Steel S-Hooks

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Corrosion resistant finish.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- **Maximum use temperature is 400° F.**
- ±4% on dimensions.
- Custom designs available - call for engineering.
- Square and hex stock available.

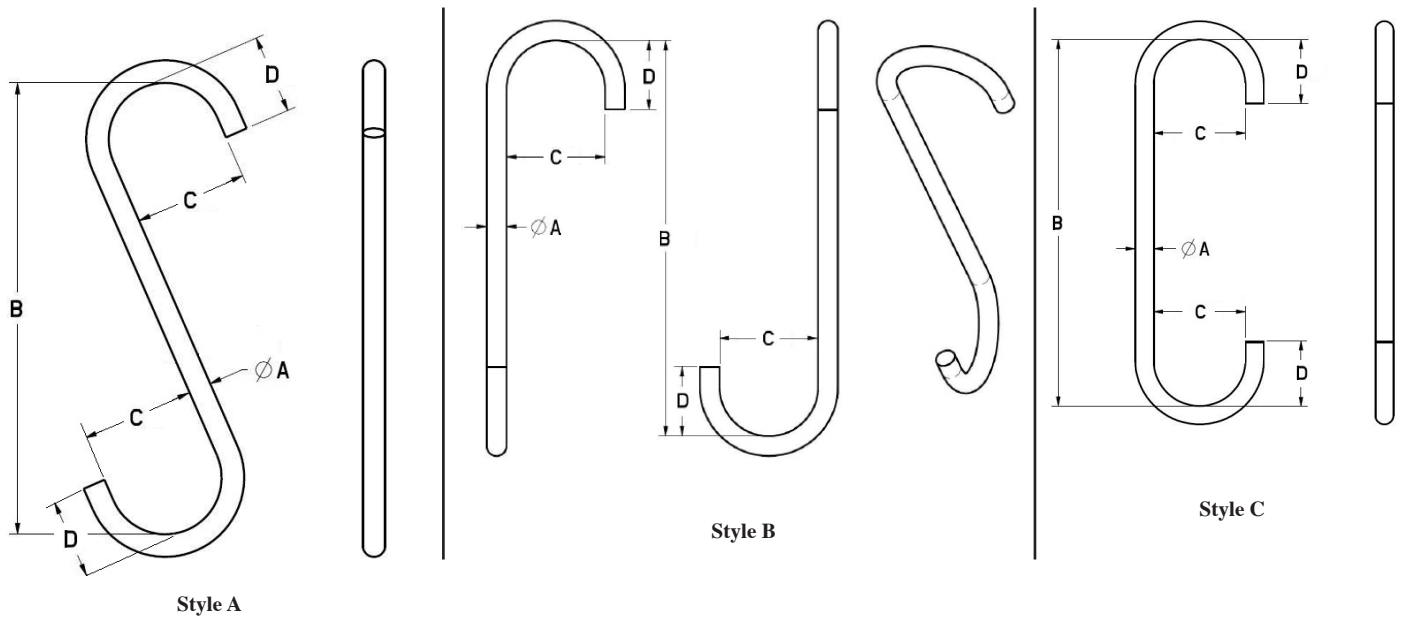

Material Diameter in Inches*	Part Number			Standard Alloy Steel S-Hooks					Working Load Limit in Pounds*
	Style A	Style B	Style C	A	B	C	D	Weight	
1/4	<b>14189</b>	<b>14198</b>	<b>14207</b>	0.25	5.00	1.25	1.25	0.1	100
5/16	<b>14190</b>	<b>14199</b>	<b>14208</b>	0.31	5.00	1.25	1.25	0.1	250
3/8	<b>14191</b>	<b>14200</b>	<b>14209</b>	0.38	6.00	1.50	1.50	0.3	365
1/2	<b>14192</b>	<b>14201</b>	<b>14210</b>	0.50	7.00	2.00	2.00	0.6	650
9/16	<b>14193</b>	<b>14202</b>	<b>14211</b>	0.56	9.00	2.25	2.25	0.9	800
5/8	<b>14194</b>	<b>14203</b>	<b>14212</b>	0.63	9.00	2.50	2.50	1.2	1,000
3/4	<b>14195</b>	<b>14204</b>	<b>14213</b>	0.75	9.00	2.25	2.25	2.1	1,790
7/8	<b>14196</b>	<b>14205</b>	<b>14214</b>	0.88	10.00	2.63	2.63	3.3	2,440
1	<b>14197</b>	<b>14206</b>	<b>14215</b>	1.00	11.00	3.00	3.00	5.0	3,190

\*Larger capacities and custom configurations available. Please call for ordering assistance.