


**Wire Rope Terminations
Wire Rope Ferrules
1/4" to 7/16" Wire Rope Diameter**

Machining & Welding
www.MachiningAndWelding.com



Sales@MachiningAndWelding.com

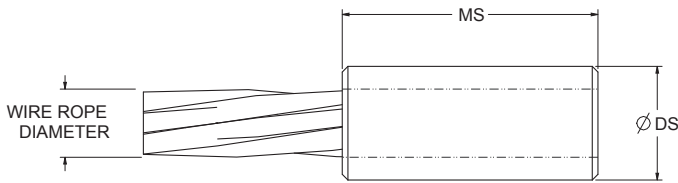

Mild carbon or stainless steel. Recommended for use on 6X19, 6X37 or 7X19 IWRC wire rope constructions only. Not intended to hold the breaking strength of the wire rope - a destructive test is recommended before use. Ends chamfered to help assembly. WHEN ORDERING: replace '-X' in part number with "M" for mild carbon steel or "S" for stainless steel material.

Part Number*	Wire Rope Diameter	DS After Swage Dim Min	DS After Swage Dim	DS After Swage Dim Max	MS (approx)	Weight Each
WR-10400-X	1/4"	0.49	0.50	0.51	1.03	0.04
WR-10401-X	1/4"	0.49	0.50	0.51	1.125	0.06
WR-10402-X	1/4"	0.49	0.50	0.51	1.25	0.04
WR-10403-X	1/4"	0.49	0.50	0.51	1.50	0.06
WR-10404-X	1/4"	0.615	0.625	0.635	0.875	0.07
WR-10405-X	1/4"	0.615	0.625	0.635	1.25	0.10
WR-10406-X	1/4"	0.615	0.625	0.635	1.50	0.12
WR-10407-X	1/4"	0.74	0.75	0.77	1.125	0.13
WR-10408-X	1/4"	0.74	0.75	0.77	1.25	0.15
WR-10409-X	1/4"	0.74	0.75	0.77	1.50	0.18
WR-10410-X	1/4"	0.855	0.875	0.895	1.00	0.17
WR-10411-X	1/4"	0.855	0.875	0.895	1.125	0.19
WR-10412-X	1/4"	0.855	0.875	0.895	1.25	0.21
WR-10413-X	1/4"	0.855	0.875	0.895	1.50	0.26
WR-10414-X	1/4"	0.98	1.00	1.02	1.125	0.26
WR-10415-X	1/4"	0.98	1.00	1.02	1.25	0.28
WR-10416-X	1/4"	0.98	1.00	1.02	1.50	0.32
WR-10417-X	1/4"	1.23	1.25	1.29	1.75	0.64
WR-10418-X	5/16"	0.615	0.625	0.635	1.25	0.08
WR-10419-X	5/16"	0.74	0.75	0.77	1.25	0.13
WR-10420-X	5/16"	0.855	0.875	0.895	0.875	0.14
WR-10421-X	5/16"	0.855	0.875	0.895	1.00	0.16
WR-10422-X	5/16"	0.855	0.875	0.895	1.25	0.20
WR-10423-X	5/16"	0.855	0.875	0.895	1.50	0.25
WR-10424-X	5/16"	0.855	0.875	0.895	2.00	0.33
WR-10425-X	5/16"	0.98	1.00	1.02	1.50	0.32
WR-10426-X	3/8"	0.74	0.75	0.77	1.50	0.15
WR-10427-X	3/8"	0.855	0.875	0.895	1.50	0.23
WR-10428-X	3/8"	0.98	1.00	1.02	1.00	0.30
WR-10429-X	3/8"	0.98	1.00	1.02	1.50	0.32
WR-10430-X	3/8"	0.98	1.00	1.02	1.75	0.36
WR-10431-X	3/8"	0.98	1.00	1.02	2.00	0.41
WR-10432-X	3/8"	1.23	1.25	1.27	2.00	0.69
WR-10433-X	7/16"	0.855	0.875	0.895	1.875	0.24
WR-10434-X	7/16"	0.855	0.875	0.895	1.625	0.23
WR-10435-X	7/16"	0.98	1.00	1.03	1.375	0.27
WR-10436-X	7/16"	0.98	1.00	1.03	1.50	0.32
WR-10437-X	7/16"	1.105	1.125	1.145	1.75	0.34

* Call for specifications on different sizes or material

WIRE ROPE TERMINATIONS