


- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Quick and easy adjustment of unbalanced loads.
- Ideally suited to low headroom applications.
- Shackle bottoms standard for rigging connections.
- Swivel hooks, eye hooks and custom connections available - call for ordering assistance.
- Made in U.S.A.
- Custom designs available - call for engineering.

- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- Beams supplied standard with shackle connections.


Prop 65 – See Page 112

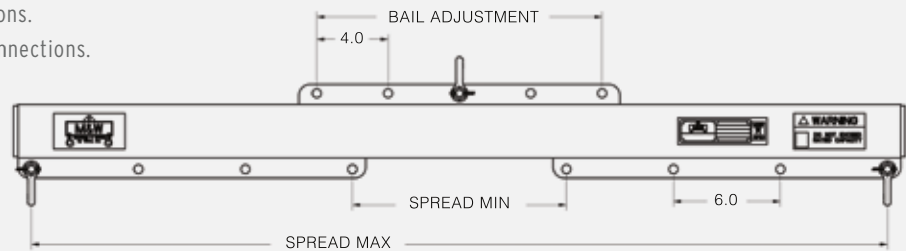

**STANDARD WITH SHACKLES**



**SHOWN WITH OPTIONAL TOP RING & HOOKS**



WORKING LOAD LIMIT IN POUNDS*	PART NUMBER	MAX SPREAD	MIN SPREAD	BAIL ADJ	HR	WEIGHT IN POUNDS	TOP SHACKLE SIZE	BOTTOM SIZE	TOP RING SIZE
500	13855	48	12	24	8.07	51	3/8"	3/8"	1/2"
500	13862	72	36	24	8.07	66	3/8"	3/8"	1/2"
500	13866	96	60	24	8.07	80	3/8"	3/8"	1/2"
1,000	13878	48	12	24	8.07	51	3/8"	3/8"	1/2"
1,000	13879	72	36	24	8.07	66	3/8"	3/8"	1/2"
1,000	13869	96	60	24	9.07	100	3/8"	3/8"	1/2"
2,000	13880	48	12	24	9.07	62	3/8"	3/8"	1/2"
2,000	13886	72	36	24	9.07	80	3/8"	3/8"	1/2"
2,000	13889	96	60	24	10.07	150	3/8"	3/8"	1/2"
2,000	13893	120	84	24	10.07	180	3/8"	3/8"	1/2"
4,000	13924	48	12	24	10.23	72	1/2"	7/16"	1/2"
4,000	13933	72	36	24	10.48	130	1/2"	7/16"	1/2"
4,000	13938	96	60	24	12.23	247	1/2"	7/16"	1/2"
4,000	14130	120	84	24	12.23	302	1/2"	7/16"	1/2"
8,000	14134	72	12	32	15.77	212	3/4"	5/8"	5/8"
8,000	14150	96	48	32	16.77	318	3/4"	5/8"	5/8"
8,000	14154	120	72	32	16.77	476	3/4"	5/8"	5/8"
10,000	14159	96	36	32	16.77	400	3/4"	5/8"	1"
10,000	14162	120	60	32	17.77	502	3/4"	5/8"	1"
10,000	14167	144	84	32	18.77	710	3/4"	5/8"	1"
14,000	14171	120	48	32	19.69	655	7/8"	3/4"	1"
14,000	14177	144	72	32	21.68	765	7/8"	3/4"	1"
14,000	14182	168	96	32	21.68	1005	7/8"	3/4"	1"
20,000	21449	120	48	32	25.62	875	1 1/4"	7/8"	1"
20,000	21450	144	72	32	28.62	1100	1 1/4"	7/8"	1"
20,000	21451	168	96	32	28.62	1235	1 1/4"	7/8"	1"

\* Call for specifications on larger sizes and capacities