- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- Do not use with damaged, obsolete or rusted containers.
- Do not exceed working load limit
- Fork pockets used for beam transport only, not for lifting.
- Made in U.S.A.
- All rigging and shackles by others.
- User must determine if container is capable of being lifted with this device in the manner proposed.
- **ALL** lifting equipment individually proof loaded per OSHA requirements and shipped with paperwork.

Prop 65 – See Page 112

UNIVERSAL BEAM

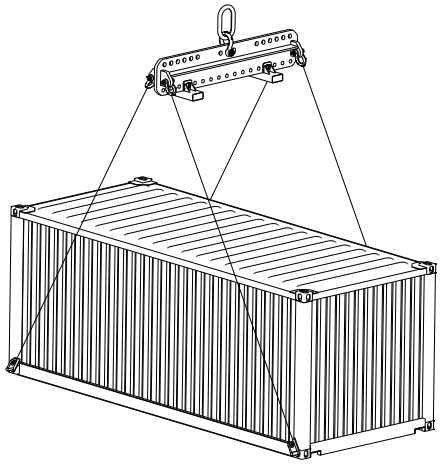

AJUSTABLE SPREADER

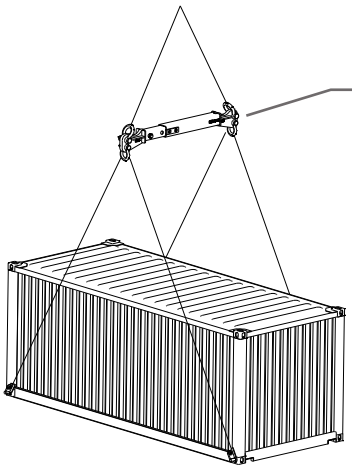

SEE PAGE 38 FOR SPREADER DETAILS

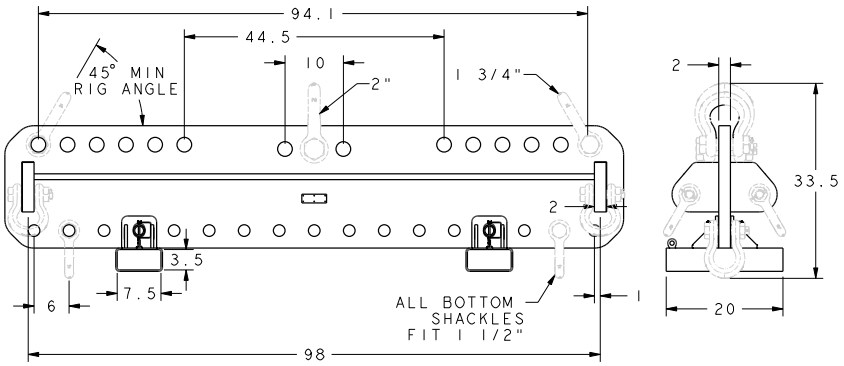

Description	Part Number	Working Load Limit in Pounds	Pick Points Outside Spread	Lower Shackles	Upper Shackles	Weight in Pounds
*Universal Beam	**25828**	75,000	98"	1 1/2"	2", 1 3/4"	1725
Adjustable Spreader	**20136**	80,000	84"- 120"	2"	2"	700*
Lift Beam	**22173**	40,000/EA	60"- 120"	1 1/82"	N/A	1574

*** Sold with transport/storage stand - not to be used for lifting**