

1,000 LB WLL		TOP BEAM: L MIN / L MAX		
		PART NUMBER		
		12"-48"	36"-72"	60"-96"
LOWER BEAMS: W MIN / W MAX	12"-48"	17560	17563	17566
	HR	16.1	16.1	17.1
	WEIGHT	154	166	201
	36"-72"	17561	17564	17567
	HR	16.1	16.1	17.1
	WEIGHT	185	198	230
	60"-96"	17562	17565	17568
	HR	16.1	16.1	17.1
	WEIGHT	210	225	258

* Call for specifications on larger sizes and capacities

2,000 LB WLL		TOP BEAM: L MIN / L MAX		
		PART NUMBER		
		12"-48"	36"-72"	60"-96"
LOWER BEAMS: W MIN / W MAX	12"-48"	17569	17572	17575
	HR	17.1	17.1	18.1
	WEIGHT	165	184	255
	36"-72"	17570	17573	17576
	HR	17.1	17.1	18.1
	WEIGHT	195	210	283
	60"-96"	17571	17574	17577
	HR	18.1	18.1	19.1
	WEIGHT	258	278	348

* Call for specifications on larger sizes and capacities

4,000 LB WLL		TOP BEAM: L MIN / L MAX			
		PART NUMBER			
		12"-48"	36"-72"	60"-96"	84"-120"
LOWER BEAMS: W MIN / W MAX	12"-48"	17578	17582	17586	17590
	HR	19.3	20.3	21.3	21.3
	WEIGHT	195	254	370	490
	36"-72"	17579	17583	17587	17591
	HR	19.3	20.3	21.3	21.3
	WEIGHT	233	290	408	460
	60"-96"	17580	17584	17588	17592
	HR	20.3	21.3	22.3	22.3
	WEIGHT	375	433	550	605
	84"-120"	17581	17585	17589	17593
	HR	20.3	21.3	22.3	22.3
	WEIGHT	436	495	612	665

* Call for specifications on larger sizes and capacities


8,000 LB WLL		TOP BEAM: L MIN / L MAX		
		PART NUMBER		
		24"-72"	48"-96"	72"-120"
LOWER BEAMS: W MIN / W MAX	12"-48"	17598	17602	17606
	HR	26	27	27
	WEIGHT	350	460	616
	36"-72"	17599	17603	17607
	HR	27	28	28
	WEIGHT	470	575	733
	60"-96"	17600	17604	17608
	HR	28	29	29
	WEIGHT	705	811	970
	84"-120"	17601	17605	17609
	HR	28	29	29
	WEIGHT	809	915	1,074

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Made in U.S.A.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.
- Standard with Shackles

Prop 65 – See Page 112



- Quick and easy adjustment of unbalanced loads.
- Ideally suited to low headroom applications.
- Eye hooks and custom connections available - call for ordering assistance.

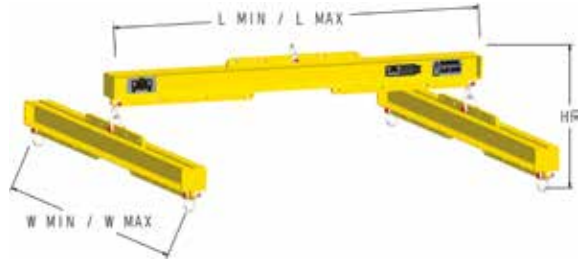

* Call for specifications on larger sizes and capacities