


- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Quick and easy adjustment of unbalanced loads.
- Ideally suited to low headroom applications.
- Standard with shackles.
- Made in U.S.A.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- All dimensions in inches unless otherwise noted.

 Prop 65 – See Page 112

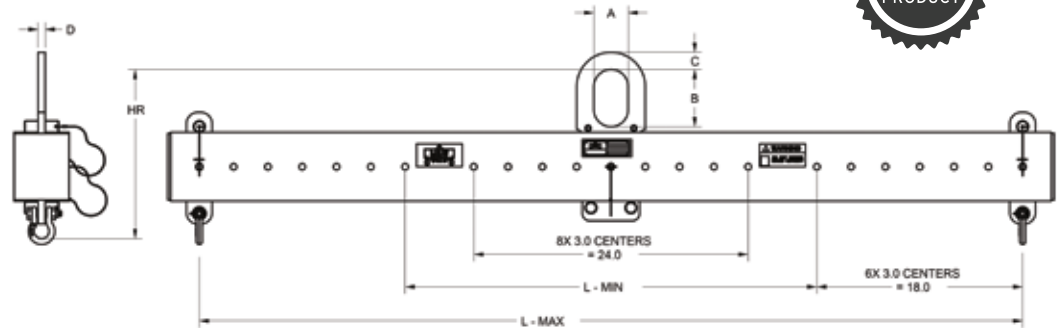

Working Load Limit in Pounds*	Part Number	L min	L max	A	B	C	D	HR	Weight in Pounds
2,000	15101	36	72	3	5	0.75	0.63	11.8	85
2,000	14678	72	144	3	5	0.75	0.63	13.8	285
4,000	12453	36	72	3	5	1.5	0.63	12.6	135
4,000	12495	72	144	3	5	1.5	0.63	14.6	331
6,000	14669	36	72	3	5	1.5	0.63	14.8	170
6,000	14661	72	144	3	5	1.5	0.63	17.8	535
8,000	12503	36	72	4	7	2	0.75	18.0	201
8,000	12512	72	144	4	7	2	0.75	20.0	543
10,000	14651	36	72	4	7	2	0.75	20.0	310
10,000	15108	72	144	4	7	2	0.75	21.0	805
15,000	15117	36	72	4	7	2	1.00	20.7	325
15,000	15128	72	144	4	7	2	1.00	23.7	830
20,000	26592	36	72	4	7	2.5	1.25	24.3	532
20,000	26593	72	144	4	7	2.5	1.25	27.3	1015
30,000	26594	36	72	5	9	3	1.25	30.3	870
30,000	26595	72	144	5	9	3	1.25	30.3	1480

* Call for specifications on larger sizes and capacities

