



- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Quick and easy adjustment of unbalanced loads.
- Swivel hooks available - call for ordering assistance.
- Made in U.S.A.
- Custom designs available - call for engineering.

- **ALL** lifting equipment individually proof loaded per OSHA requirements.

Prop 65 – See Page 112

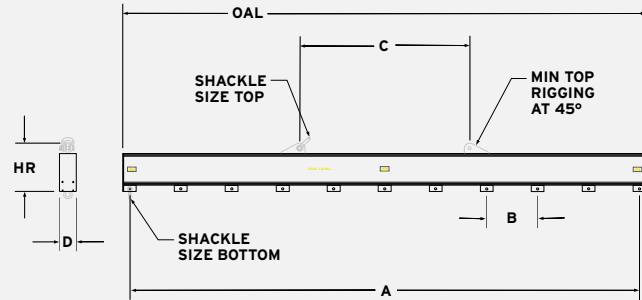

* Sold without shackles, hooks or top rigging

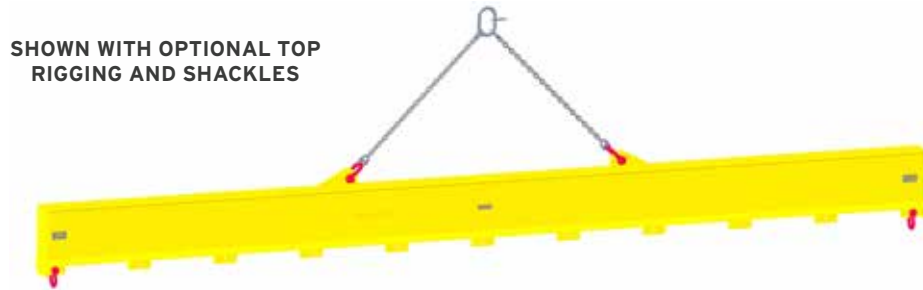

SHOWN WITH OPTIONAL TOP RIGGING AND SHACKLES



WORKING LOAD LIMIT IN POUNDS*	PART NUMBER	A	B	C	D	OAL	HR	WEIGHT IN POUNDS	SHACKLE TOP	SHACKLE BOTTOM	OPTIONAL TOP RIGGING PART NUMBER
4,000	26111	120	20"	60"	6.75"	126.5"	16.03"	690	1/2"	1/2"	26358
4,000	26112	240	24"	80"	6.75"	246.5"	16.03"	1310	1/2"	1/2"	26358
4,000	26113	360	22.5"	120"	6.75"	366.5"	16.06"	1935	1/2"	1/2"	26359
6,000	26114	120	20"	60"	7.5"	126.5"	17.72"	715	3/4"	5/8"	26360
6,000	26115	240	24"	80"	7.5"	246.5"	17.72"	1352	3/4"	5/8"	26360
6,000	26116	360	22.5"	120"	7.5"	366.5"	17.72"	1995	3/4"	5/8"	26361
10,000	26117	120	20"	60"	7.88"	126.5"	22.94"	830	7/8"	7/8"	26366
10,000	26118	240	24"	80"	7.88"	246.5"	22.94"	1565	7/8"	7/8"	26366
10,000	26119	360	22.5"	120"	7.88"	366.5"	22.94"	2290	7/8"	7/8"	26367
20,000	26120	120	20"	60"	7.88"	126.5"	22.94"	830	1 1/4"	7/8"	26362
20,000	26121	240	24"	80"	14.6"	247"	25.54"	2545	1 1/4"	7/8"	26362
20,000	26122	360	22.5"	120"	14.6"	367"	25.54"	3675	1 1/4"	7/8"	26363
40,000	26123	120	20"	60"	12.12"	130.75"	25.2"	1290	1 3/4"	1 1/8"	26364
40,000	26124	240	24"	80"	14.6"	250.75"	28.76"	2740	1 3/4"	1 1/8"	26364
40,000	26125	360	22.5"	120"	12.3"	370.75"	37.7"	4075	1 3/4"	1 1/8"	26365

* Call for specifications on larger sizes and capacities