


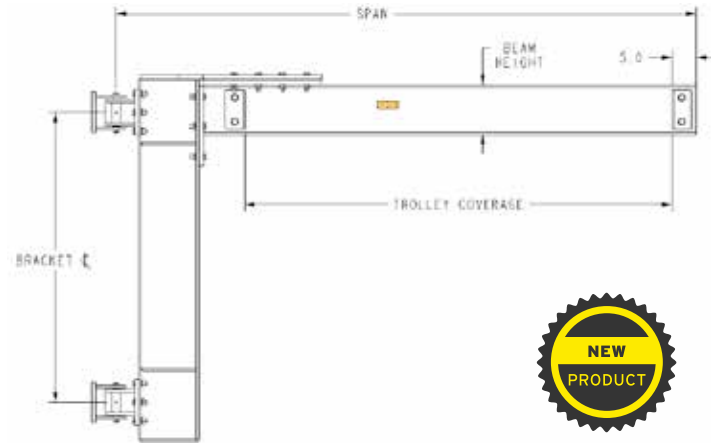
CRANES

Wall Mounted Cantilever Jib Cranes

EACH CRANE COMES STANDARD WITH:

- Bolt together design for ease of shipping & install
- 4 trolley end stops
- Touch up paint
- Drill template for hinge bolt pattern
- Powder coat yellow
- Options: Rotation stops, tag line, color

 Prop 65 – See Page 112



| Part # | Capacity | Span | Bracket CL | Beam Height | Flange Width | Trolley Coverage | Thrust / Pull | Weight |
|--------|---------------------|------|------------|-------------|--------------|------------------|---------------|--------|
| 25733 | 1/2 Ton (1,000 LBS) | 8' | 4' | 8.1" | 5.3" | 64.5" | 2,965 | 780 |
| 25734 | 1/2 Ton (1,000 LBS) | 10' | 4' | 8.1" | 5.3" | 88.5" | 3,867 | 815 |
| 25735 | 1/2 Ton (1,000 LBS) | 12' | 4' | 8.1" | 5.3" | 112.5" | 4,616 | 855 |
| 25736 | 1/2 Ton (1,000 LBS) | 14' | 4' | 8.1" | 5.3" | 136.5" | 5,382 | 890 |
| 25737 | 1/2 Ton (1,000 LBS) | 16' | 4' | 10.3" | 5.8" | 160.5" | 6,471 | 1050 |
| 25738 | 1/2 Ton (1,000 LBS) | 18' | 4' | 10.3" | 5.8" | 184.5" | 7,352 | 1100 |
| 25739 | 1/2 Ton (1,000 LBS) | 20' | 6' | 12.3" | 6.5" | 209" | 5,665 | 1295 |
| 25740 | 1 Ton (2,000 LBS) | 8' | 4' | 8.1" | 5.3 | 64.5" | 5,797 | 780 |
| 25741 | 1 Ton (2,000 LBS) | 10' | 5' | 10.3" | 5.8 | 88.5" | 5,801 | 960 |
| 25742 | 1 Ton (2,000 LBS) | 12' | 5' | 10.3" | 5.8 | 112.5" | 7,010 | 1010 |
| 25743 | 1 Ton (2,000 LBS) | 14' | 5' | 10.3" | 5.8 | 136.5" | 8,135 | 1030 |
| 25744 | 1 Ton (2,000 LBS) | 16' | 6' | 12.3" | 6.5 | 160.5" | 7,849 | 1175 |
| 25745 | 1 Ton (2,000 LBS) | 18' | 6' | 16.4" | 7.1 | 180.5" | 9,708 | 1895 |
| 25488 | 1 Ton (2,000 LBS) | 20' | 6' | 16.4" | 7.1 | 204.5" | 10,969 | 2010 |
| 25746 | 2 Ton (4,000 LBS) | 8' | 4' | 12.3" | 6.5 | 63.5" | 11,239 | 910 |
| 25747 | 2 Ton (4,000 LBS) | 10' | 4' | 12.3" | 6.5 | 87.5" | 13,909 | 975 |
| 25748 | 2 Ton (4,000 LBS) | 12' | 4' | 12.3" | 6.5 | 111.5" | 16,646 | 1035 |
| 25749 | 2 Ton (4,000 LBS) | 14' | 5' | 16.4" | 7.1 | 131.5" | 16,139 | 1670 |
| 25750 | 2 Ton (4,000 LBS) | 16' | 6' | 18" | 7.5 | 154" | 15,276 | 1740 |
| 25751 | 2 Ton (4,000 LBS) | 18' | 6' | 18" | 7.5 | 178" | 17,241 | 1840 |
| 25496 | 2 Ton (4,000 LBS) | 20' | 6'6" | 21" | 8.3 | 199" | 18,234 | 2305 |
| 25752 | 3 Ton (6,000 LBS) | 8' | 4' | 16.4" | 7.1 | 59.5" | 16,890 | 1305 |
| 25753 | 3 Ton (6,000 LBS) | 10' | 4' | 16.4" | 7.1 | 83.5" | 20,938 | 1420 |
| 25754 | 3 Ton (6,000 LBS) | 12' | 6' | 16.4" | 7.1 | 107.5" | 16,751 | 1670 |
| 25755 | 3 Ton (6,000 LBS) | 14' | 6' | 16.4" | 7.1 | 131.5" | 19,481 | 1790 |
| 25756 | 3 Ton (6,000 LBS) | 16' | 6'6" | 18" | 7.5 | 154" | 20,472 | 1820 |
| 25757 | 3 Ton (6,000 LBS) | 18' | 7'6" | 21" | 8.3 | 175" | 20,286 | 2300 |
| 25758 | 3 Ton (6,000 LBS) | 20' | 9'6" | 21" | 8.3 | 199" | 17,616 | 2560 |