


## LIFTING BEAMS

Small Length Lift Beams - Shackle Top

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Lifting Beams proof loaded and shipped with certification paperwork.
- Durable construction ideally suited to warehouse use.
- Made in U.S.A.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- Supplied with shackles.


 Prop 65 – See Page 112

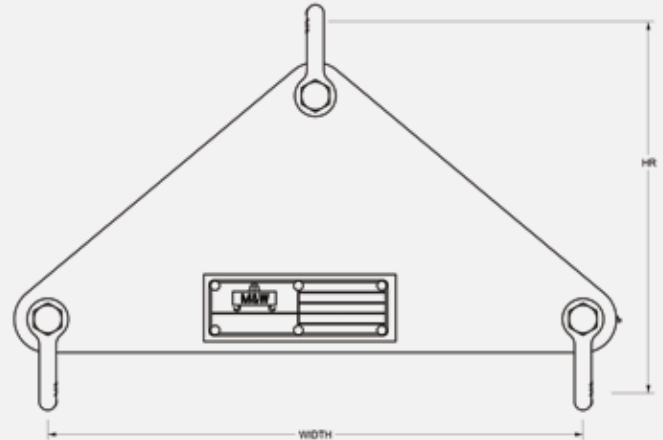

WORKING LOAD LIMIT IN POUNDS*	PART NUMBER	TOP	HR	WIDTH	WEIGHT IN POUNDS	BOTTOM SHACKLE	TOP SHACKLE
500	20358	Shackle	8.3	12	9	3/8"	3/8"
500	20359	Shackle	8.3	24	16	3/8"	3/8"
500	20360	Shackle	8.3	36	22	3/8"	3/8"
2,000	20361	Shackle	12.4	12	19	5/8"	5/8"
2,000	20362	Shackle	12.4	24	33	5/8"	5/8"
2,000	20363	Shackle	12.4	36	46	5/8"	5/8"
6,000	20364	Shackle	14.1	12	32	3/4"	3/4"
6,000	20365	Shackle	14.1	24	54	3/4"	3/4"
6,000	20366	Shackle	14.1	36	73	3/4"	3/4"
10,000	24047	Shackle	17	12	40	3/4"	7/8"
10,000	24048	Shackle	17	24	62	3/4"	7/8"
10,000	24049	Shackle	17	36	86	3/4"	7/8"
20,000	20367	Shackle	21.2	24	107	7/8"	1 1/4"
20,000	20368	Shackle	21.2	36	145	7/8"	1 1/4"
40,000	24050	Shackle	32	24	271	1 1/4"	1 3/4"
40,000	24051	Shackle	32	36	346	1 1/4"	1 3/4"
80,000	24052	Shackle	42	24	585	1 3/4"	2 1/2"
80,000	24053	Shackle	42	36	725	1 3/4"	2 1/2"

\* Call for specifications on larger sizes and capacities

STANDARD  
WITH  
SHACKLES



SHOWN WITH  
OPTIONAL  
HOOKS AND  
TOP LINK

